

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
8 February 2001 (08.02.2001)

PCT

(10) International Publication Number  
WO 01/09239 A1(51) International Patent Classification<sup>7</sup>: C08L 53/02,  
B32B 27/00, A61L 15/58, A43B 13/14

(21) International Application Number: PCT/US00/20826

(22) International Filing Date: 28 July 2000 (28.07.2000)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
60/146,008 28 July 1999 (28.07.1999) US  
60/197,161 13 April 2000 (13.04.2000) US  
60/203,558 11 May 2000 (11.05.2000) US(71) Applicant (for all designated States except US): THE  
DOW CHEMICAL COMPANY [US/US]; 2030 Dow  
Center, Midland, MI 48674 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PATEL, Rajen, M.  
[US/US]; 114 Scarlet Oak, Lake Jackson, TX 77566 (US).  
HAHN, Stephen, F. [US/US]; 4302 James Drive, Mid-  
land, MI 48642 (US). CHUM, Pak-Wing, S. [US/US]; 126Juniper Street, Lake Jackson, TX 77566 (US). WALSH,  
Leonie, K. [AU/US]; 210 Hawthorne Street #B, Houston,  
TX 77006 (US). MAUGANS, Rexford, A. [US/US]; 211  
Huckleberry Drive, Lake Jackson, TX 77566 (US). HO,  
Thoi, H. [US/US]; 54 Orchid Court, Lake Jackson, TX  
77566 (US). BENSASON, Selim [TR/US]; 2347 Sheridan  
Road, Number 2, Houston, TX 77030 (US). ESNEAULT,  
Calvin, P. [US/US]; 14776 Colonel Allen Court, Baton  
Rouge, LA 70816 (US).(74) Agent: MCKINNEY, Osborne, K.: Intellectual Property,  
B-1211, 2301 Brazosport Boulevard, Freeport, TX 77541  
(US).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CZ, DE, DK,  
DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID,  
IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU,  
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,  
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,  
UG, US, UZ, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: HYDROGENATED BLOCK POLYMERS HAVING ELASTICITY AND ARTICLES MADE THEREFROM

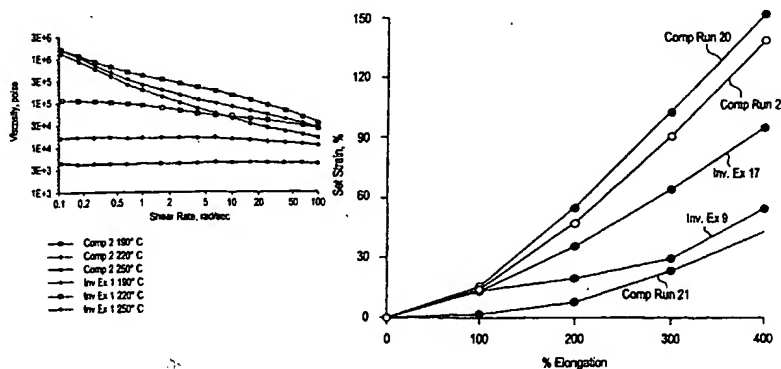

(57) Abstract: The present invention relates to an elastic article comprising at least one hydrogenated block polymer and, optionally, at least one other polymer selected from the group consisting of a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic interpolymers, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub> α-olefin interpolymers, a C<sub>3</sub>-C<sub>20</sub> α-olefin/conjugated diene interpolymers, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic copolyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymers, and an elastomeric metallocene-catalyzed synthetic polymer or a blend, or formulated system thereof. In particular, the invention pertains to elastic shaped articles such as, for example, but not limited to: elastic fibers, elastic fabric, and elastic film, as well as composite comprising the same, especially a composite absorbent item comprising at least one elastic shaped article. Inventive composite items include, but are not limited to, feminine hygiene napkins, incontinence pads, disposable diapers, and training pants. The term "elastic article" is used in reference to shaped items, while the term "elastic material" is used in reference to the novel compositions of the invention.

WO 01/09239 A1

WO 01/09239 A1



IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *With international search report.*

**HYDROGENATED BLOCK POLYMERS HAVING ELASTICITY AND ARTICLES  
MADE THEREFROM**

5       The present invention relates to a composition or an elastic article comprising at least one hydrogenated block polymer and, optionally, at least one other polymer selected from the group consisting of a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl ,  
10   aromatic interpolymer, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin interpolymer, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin/conjugated diene interpolymer, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic copolyester, a partially  
15   hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymer, and an elastomeric metallocene-catalyzed synthetic polymer or a blend or formulated system thereof. In particular, the invention  
20   pertains to elastic shaped articles such as, for example, but not limited to, elastic fibers, elastic fabric, and elastic film as well as composites comprising the same, especially a composite absorbent item comprising at least one elastic shaped article. Inventive composite items include, but are  
25   not limited to, feminine hygiene napkins, incontinence pads, disposable diapers (for example, pull-up diapers), and training pants.

      Materials with excellent stretchability and elasticity are needed to manufacture a variety of disposal and durable  
30   articles such as, for example, incontinence pads, disposable diapers, training pants, sports apparel and furniture upholstery. Stretchability and elasticity are performance attributes that function to effectuate a closely conforming fit to the body of the wearer or to the frame of the item.  
35   It is desirable to maintain the conforming fit during repeated use, extensions and retractions at body temperatures. Further, for incontinence articles,

stretchability and elasticity are particularly desirable to ensure comfort and provide security against unwanted leaks.

Disposable articles are typically elastic composite materials prepared from a combination of polymer film, fibers, sheets and absorbent materials as well as a combination of fabrication technologies. Whereas the fibers are prepared by well known processes such as spun bonding, melt blowing, melt spinning and continuous filament winding techniques, the film and sheet forming processes typically involve known extrusion and coextrusion techniques, for example, blown film, cast film, profile extrusion, injection molding, extrusion coating, and extrusion sheeting.

A material is typically characterized as elastic where it has a high percent elastic recovery (that is, a low percent permanent set) after application of a biasing force. Ideally, elastic materials are characterized by a combination of three important properties, that is, a low percent permanent set, a low stress or load at strain, and a low percent stress or load relaxation. That is, there should be (1) a low stress or load requirement to stretch the material, (2) no or low relaxing of the stress or unloading once the material is stretched, and (3) complete or high recovery to original dimensions after the stretching, biasing or straining is discontinued.

LYCRA (a spandex supplied by Dupont Chemical Company) is a segmented polyurethane elastic material that is known to exhibit good elastic properties. But LYCRA tends to be extremely cost prohibitive in several applications. Also, LYCRA like natural rubbers tends to exhibit poor environmental resistance to ozone, chlorine and high temperature, especially in the presence of moisture.

Block polymers generally are elastomeric materials that exhibit excellent solid-state elastic performance attributes. But unsaturated block polymers such as, for example, styrene-butadiene-styrene triblock polymers, tend to exhibit mediocre



thermal stability, especially in the molten state and poor UV stability.

Conversely, known partially hydrogenated (or partially saturated) styrene block copolymers (for example, KRATON G  
5 block copolymers supplied by Shell Chemical Company) are difficult to melt process and draw into fibers or films. In fact, preparation of fine denier fiber (that is, less than or equal to 40 denier) or thin film (that is, less than or equal to 2 mils (0.051 mm)) from partially hydrogenated or  
10 partially saturated block polymers is generally not possible at commercial fabrication rates. To overcome characteristic melt processing and drawing difficulties, partially hydrogenated block copolymers are commonly formulated with various additives such as oils, waxes and tackifiers. But in  
15 order to achieve good melt processability and drawability, very high levels of low molecular weight additives are typically required which tend to compromise strength and elastic properties.

WO 95/33006 discloses blends of styrene block polymers  
20 with substantially linear ethylene polymers. This disclosure describes as one advantage of blending with substantially linear ethylene polymers an improvement in processability. That is, the ethylene polymers are described as fusion promoters and processing aids which reduce the processing  
25 delay times characteristic of (partially) saturated styrene block copolymers.

Hydrogenated block copolymers of vinyl aromatic and conjugated dienes such as styrene-butadiene-styrene polymers are well known in the art. U.S. Patent Nos. 3,333,024;  
30 3,431,323; 3,598,886; 5,352,744; 3,644,588 and EP-505,110 disclose various hydrogenated block copolymers. In particular, full hydrogenation of the aromatic ring of the block polymers has been investigated. But polymer scientists contend that fully hydrogenated styrene-butadiene-styrene  
35 copolymers (that is, complete saturation of the vinyl aromatic monomer unit as well as the conjugated diene monomer)

unit) have no useful properties at elevated temperatures, even if only slightly elevated. For example, Thermoplastic Elastomers, 2<sup>d</sup> edition, 1996, page 304, lines 8-12. "Thus, polystyrene remains the choice for any amorphous hydrocarbon block copolymer. This last fact is clearly demonstrated in the case of the fully hydrogenated VCH-EB-VCH polymer. The interaction parameter is so severely reduced by hydrogenation that at only slightly elevated temperatures, the polymer loses all strength and appears to be homogeneously mixed at ordinary melt temperatures."

In spite of various disclosures relating to elastic materials, including disclosures pertaining to hydrogenated block polymers as well as blends consisting of block polymers and ethylene polymers, such as for example US Patent No. 5,093,422 to Himes and SIR No. H1,808 to Djiauw et al., there is a present need for cost-effective elastic compositions (and articles thereof) having good processability while maintaining strength and elastic properties. There is also a need for a method of making elastic articles having good elasticity at elevated temperatures. We have discovered that these and other objects can be completely met by the invention herein described.

#### Summary of the Invention

We have discovered that a new composition comprising at least one substantially hydrogenated block polymer or a blend thereof or a formulated system thereof which surprisingly exhibits improved melt drawability and processability (and in certain embodiments improved elastic properties) while providing retained or improved strength properties.

We have also discovered that this new composition can be conveniently used to prepare improved disposable and durable elastic articles with or without the use of various additives such as processing aids, oils, waxes, polyolefins and tackifiers. But, whereas typically high compositional

strength and good processability are inversely related or mutually exclusive, surprisingly, we found that the inventive formulated system exhibits exceptional high strength for a given processing melt flow rate.

5       The broad aspect of the present invention is a composition comprising at least one substantially hydrogenated block polymer, wherein the block polymer is characterized as having

10       i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

15       ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (A) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (B) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

20       iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

25       Another aspect of the invention is a shaped elastic article (for example, a film, sheet, coating, band, strip, profile, molding, foam, tape, fabric, thread, filament, ribbon, fiber, plurality of fibers or, fibrous web, especially a film, sheet, fabric, fiber, plurality of fibers or, fibrous web) comprising at least one substantially  
30       hydrogenated block polymer characterized as having

      i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (A) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (B) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

A third aspect of the invention is a composition comprising a blend of

(A) at least one substantially hydrogenated block polymer characterized as having

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (A) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (B) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis; and (B) at least one other polymeric material.

A fourth aspect of the invention is an elastic shaped article comprising the blend.

A fifth aspect of the invention is a formulated system comprising

(A) at least one substantially hydrogenated block polymer characterized as having

5 i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

10 ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (A) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (B) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

15 iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis; and

20 (B) an oil; and optionally,

(C) from 0 to 60 weight percent of polyolefin having a weight average molecular weight greater than 10,000, preferably greater than 20,000, more preferably greater than 30,000, as determined using gel permeation chromatography;

25 (D) from 0 to 40 weight percent of a wax; and

(E) from 0 to 50 weight percent of a tackifier.

A sixth aspect of the invention is an elastic shaped article comprising the formulated system.

30 A seventh aspect of the invention is a method of making an elastic shaped article, the method comprising providing at least one substantially hydrogenated block polymer characterized as having

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (A) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (B) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

Preferably, the elastic shaped article is fabricated using an extrusion technique (that is, the method consists of melting the inventive block polymer). Suitable extrusion techniques include, but are not limited to, fiber melt spinning, fiber melt blowing, film blowing, cast film, injection molding, blow molding, profile extrusion, or rotomolding techniques.

In one preferred embodiment, the elastic composition or the elastic fiber, fabric, film or other shaped article is irradiated or crosslinked using any suitable technique. Preferably, however, irradiation or crosslinking is effectuated using ionizing radiation provided by electron beam irradiation. Preferably, the extrudate, filament, web or part is permitted to cool or is quenched to ambient temperature (that is, permitted to substantially solidify) before the application of additional heating or ionizing radiation to effectuate irradiation or crosslinking. Most preferably, the electron beam radiation is conducted under an inert atmosphere such as, for example, under nitrogen.

In another preferred embodiment of the invention, the at least one other polymeric material is a homogeneously branched ethylene polymer, especially a substantially linear ethylene polymer.

We unexpectedly discovered that substantially hydrogenated block polymers, even at molecular weights substantially higher than comparative partially hydrogenated block polymers, can be successfully melt drawn, including  
5 meltspun into fine denier fibers, where the comparative block polymer can not be melt drawn nor meltspun into fibers at any denier. This discovery is believed to be attributable to the surprising low low shear melt viscosities of substantially hydrogenated block polymers. Ordinarily, polymeric materials  
10 with higher molecular weights are expected to exhibit commensurately higher melt viscosities, (and subsequently, poor processability and melt drawability) and certainly are not expected to exhibit dramatically lower viscosities.

Another surprise of the present invention is the  
15 inventive blend shows improved elasticity at certain component percentages in contrast to ordinary component percentages and comparative blends which generally suggest blending will deteriorate elasticity or strength performance.

Another surprise is the inventive formulated system  
20 shows significantly higher tensile strength while maintaining good processability, as indicated by higher melt flow rates, relative to a formulated partially hydrogenated block polymer system. Another way of stating this unexpected surprise is the inventive formulated system exhibits significantly  
25 improved processability at equivalent tensile strength relative to comparative formulated systems.

#### **Brief Description of the Drawings**

FIG. 1 is a plot of the low shear rheology of Inventive  
30 Example 1 and comparative run 2.

FIG. 2 is a plot of the five cycle percent permanent set at 23°C for Inventive Example 1 at 117 denier and comparative run 8 at 140 denier.

FIG. 3 is a plot of the thermomechanical analysis (TMA)  
35 probe penetration data for Inventive Examples 1, 3 and 4 and comparative runs 2, 5 and 7.

FIG. 4 is a plot of tensile strength (in psi) versus melt flow rate at 200°C/5 kg (in g/10 minutes) for Inventive Examples 9-12 and comparative runs 2 and 13-15.

FIG. 5 is a plot of percent set strain versus percent elongation for Inventive Examples 9, 16 and 17, Example 18 and comparative runs 20 and 21.

FIG. 6 is a plot of percent set strain versus percent elongation for Inventive Example 9, Example 18 and comparative runs 20-23.

FIG. 7 is a plot of percent set strain versus percent elongation for Inventive Examples 9 and 17 and comparative runs 20, 21 and 24.

The term "elastic article" is used in reference to shaped items, while the term "elastic material" references the new composition of the invention.

The term "elastic" or "elastic-like behavior" as used herein refers to any material (for example, bands, ribbons, strips, tapes, profile, moldings, sheets, coatings, films, threads, filament, fibers, fibrous webs, and fabrics as well as laminates or composites including the same) having a permanent set less than or equal to 60 percent, especially less than or equal to 50 percent and most especially less than or equal to 25 percent (that is, most especially greater than or equal to 87.5 percent recovery) at 200 percent strain and at a temperature between its glass transition temperature and its crystalline melting point or range is stretchable to a stretched, biased length at least 200 percent greater than its relaxed, unstretched length. The extent that a material does not return to its original dimensions after being stretched is its percent permanent set.

Elastic polymeric materials are also referred to in the art as "elastomers" and "elastomeric" and materials with a permanent set of less than 10 percent when stretched to a stretched, biased length of at least 200 percent greater their original relaxed, unstretched lengths are considered "highly elastic". Preferred elastic shaped articles are



fibers and film.

The term "nonelastic or inelastic" as used herein means the material or article is not elastic as defined herein (that is, the material or article has a percent permanent set greater than 60 at 200 percent strain).

The term "laminate" as used herein refers to the combination of two different members of an article or item (or an eventual article or item as formation laminate is often an intermediate fabrication step), attached to one another with or without the use of an adhesive material such as a hot melt adhesive based on an ethylene/vinyl acetate (EVA) copolymer. Where an adhesive is not used, the attachment can be accomplished using a thermal bonding technique. The members are typically layers or plies and preferably at least one of the members will comprise an elastic material.

The term "composite" is used herein to refers to combination of two or more members or materials, at least two of which having different forms, to provide an article or item.

An absorbent article can comprise one or more of the various fluid handling members, such as one or more fluid acquisition member, one or more fluid distribution members and/or one or more fluid storage members or a combination acquisition/distribution layer. Each of these members can comprise on or more sub-elements, which can be homogeneous or not, for example, each member can be made from the same material but in different forms or they can be made from several materials.

For example, such members can be layers, optionally consisting of sub- layers, and or optionally having different composition, or density, or thickness.

Each of these members can have a specialized functionality, such as primarily providing acquisition functionality or primarily providing fluid storage functionality.

Alternatively, members can have multiple functionality, such as the very first "cellulose only" diapers wherein the cellulose fluff performed acquisition, distribution and ultimate storage functionality at the same time.

5       The "storage absorbent member" refers to the absorbent member(s) of the absorbent core that function primarily to ultimately store absorbed fluids.

10       A "fluid distribution member" in the meaning of the present invention is a member, which satisfies the requirements as laid out for the fluid distribution functionality, regardless whether the member also has some other fluid handling functionality.

15       A "fluid acquisition member" refers to parts of the absorbent core, which are primarily designed to receive liquid as it reaches the absorbent article.

20       A "acquisition distribution layer or member" refers to that member of the absorbent article or item that primarily functions to receive liquid as it reaches the absorbent article or item and transfers the received liquid to the storage member of the article or item.

25       As used herein, the term "absorbent core material" refers to the member of the absorbent article that is primarily responsible for fluid handling of the article, thus including the "fluid handling member(s)". As such, the absorbent core material typically does not include the topsheet or backsheet of the absorbent article, though in certain instances the topsheet could be considered, for example, to provide specific fluid acquisition performance.

30       An absorbent core can be divided into "regions" of the core, wherein such "regions" can perform the functionality of one or more of the members as outlined above. Thus, an acquisition region can comprise an acquisition member (and also comprise other members), it can consist of an acquisition member (and nothing else), which can consist of  
35       an acquisition material. Or, an acquisition/distribution

region can comprise both an acquisition member and a distribution member.

As used herein, the term "absorbent articles" refers to devices which absorb and contain body exudates, and, more specifically, refers to devices which are placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. As used herein, the term "body fluids" includes but is not limited to urine, menses, vaginal discharges, sweat and feces.

The term "disposable" is used herein to describe articles or items that are not intended to be laundered or otherwise restored or reused as originally provided (that is, they are intended to be discarded after use and, preferably, to be recycled, composted or otherwise disposed of in an environmentally compatible manner).

As used herein, the terms "region(s)" or "zone(s)" refer to portions or sections of the absorbent member. Thereby, the region(s) or zone(s) can be two-dimensional (front / back) or can be three-dimensional (like an acquisition region having - even if it were in the form of a layer - a three-dimensional extension).

As use herein, the term "layer" refers to an absorbent member whose primary dimension is X-Y, that is, along its length and width. It should be understood that the term layer is not necessarily limited to single layers or sheets of material. Thus the layer can comprise laminates or combinations of several sheets or webs of the requisite type of materials. Accordingly, the term "layer" includes the terms "layers" and "layered".

For purposes of this invention, the term "upper" should be understood to refer to absorbent members, such as layers, that are nearest to the wearer of the absorbent article, and typically face the topsheet of an absorbent article; conversely, the term "lower" refers to absorbent members that are furthestmost away from the wearer of the absorbent article and typically face the backsheet.

The "superabsorbent polymer" is used herein in the conventional sense in reference to polymeric materials that imbibe fluid and thereby form a swollen hydrogel. That is, a superabsorbent polymer is a hydrogel-forming polymeric gelling agent. In particular, the polymeric gelling agent comprises a substantially water-insoluble, slightly crosslinked, partially neutralized, hydrogel-forming polymer material that is typically prepared from polymerizable, unsaturated, acid-containing monomers and often grafted onto other types of polymer moieties and then slightly crosslinked with agents such as, for example, triallyl amine. See, for example, U.S. Patent No. 5,061,259 and U.S. Patent No. 4,654,039 for additional description pertaining to superabsorbent polymers. Superabsorbent polymer is referenced herein by the acronym "SAP".

The term "geotextile" is used herein to refer to any fabricated item that has an in-service use in contact with or in association with the ground such as, for example, a snow fence, mulch fabric, or mulch film.

The term "flushable" as used herein refers any item that may be discarded into a urinal (whether public or home-based) and subsequently flushed without damage being done to the attached plumbing. By the term "urinal" refers to a flushing device such as a home-based toilet, a public toilet or an upright men's device made solely for the purpose of male urination. Examples of flushable items are described in WO 00/13623, WO 99/52482 and WO 99/65985.

The term "homofil" as used herein refers to fiber which has a single polymer region or domain and does not have any other distinct polymer regions (as do bicomponent fibers), even though the polymer itself may have a plurality of phases or microphases.

The term "meltblown" is used herein in the conventional sense to refer to fibers formed by extruding the molten elastic composition through a plurality of fine, usually circular, die capillaries as molten threads or filaments into

converging high velocity gas streams (for example, air) which function to attenuate the threads or filaments to reduced diameters. Thereafter, the filaments or threads are carried by the high velocity gas streams and deposited on a  
5 collecting surface to form a web of randomly dispersed fibers with average diameters generally smaller than 10 microns.

The term "spunbond" is used herein in the conventional sense to refer to fibers formed by extruding the molten elastic composition as filaments through a plurality of fine,  
10 usually circular, die capillaries of a spinneret with the diameter of the extruded filaments then being rapidly reduced and thereafter depositing the filaments onto a collecting surface to form a web of randomly dispersed spunbond fibers with average diameters generally between 7 and 30 microns.

15 The term "nonwoven" as used herein and in the conventional sense means a web or fabric having a structure of individual fibers or threads which are randomly interlaid, but not in an identifiable manner as is the case for a knitted fabric. The elastic fiber of the present invention  
20 can be employed to prepare inventive nonwoven elastic fabrics as well as composite structures comprising the elastic nonwoven fabric in combination with nonelastic materials.

The term "conjugated" refers to fibers which have been formed from at least two polymers extruded from separate  
25 extruders but meltblown or spun together to form one fiber. Conjugated fibers are sometimes referred to in the art as multicomponent or bicomponent fibers. The polymers are usually different from each other although conjugated fibers may be monocomponent fibers. The polymers are arranged in  
30 substantially constantly positioned distinct zones across the cross-section of the conjugated fibers and extend continuously along the length of the conjugated fibers. The configuration of conjugated fibers can be, for example, a sheath/core arrangement (wherein one polymer is surrounded by  
35 another), a side by side arrangement, a pie arrangement or an "island-in-the-sea" arrangement. (Conjugated fibers are

described in U.S. Patent No. 5,108,820 to Kaneko et al.; U.S. Patent No. 5,336,552 to Strack et al.; and U.S. Patent No. 5,382,400 to Pike et al. The elastic fiber of the present invention can be in a conjugated configuration, for example,  
5 as a core or sheath, or both.

The term "thermal bonding" is used herein refers to the heating of fibers to effect the melting (or softening) and fusing of fibers such that a nonwoven fabric is produced. Thermal bonding includes calendar bonding and through-air  
10 bonding as well as methods known in the art.

The expression "thermal bondable at a reduced hot melt adhesive amount" refers to comparative peel test results using Ato Findley Adhesive HX9275 (supplied by Ato Findley Nederlands B. V., Roosendaal, The Netherlands) or H. B.  
15 Fuller Adhesive D875BD1 (supplied by H. B. Fuller GmbH, I-Oneburg, Germany) and test procedures and methods described in WO 00/00229 wherein the same peel strength as the adhesive without deploying thermal bonding can be obtained even though the quantity of adhesive is at least 15 percent less where  
20 thermal bonding is deployed.

The term "substantially hydrogenated block polymer" as used herein means a block copolymer that is characterized as having a hydrogenation level of greater than 90 percent (by number) for each vinyl aromatic monomer unit block and a  
25 hydrogenation level of greater than 95 percent (by number) for each conjugated diene polymer block, where for both the vinyl aromatic monomer and conjugated diene monomer repeating unit blocks, hydrogenation converts unsaturated moieties into saturated moieties.

30 The term "partially hydrogenated block polymer" as used herein means a block polymer that is hydrogenated but does not meet the hydrogenation levels that define a substantially hydrogenated block polymer.

The term "blend" is used herein means a mixture or  
35 combination of at least one substantially hydrogenated block polymer with at least one other polymeric material. The

mixture or combination can be prepared by any known technique including melt blending, dry blending (for example, tumble blending) or the solution mixing.

The term "formulated system" as used herein means the combination of at least one substantially hydrogenated block polymer with at least one low molecular viscosity-reducing additive. Suitable low molecular weight viscosity-reducing additives include, for example, but not limited to, oils (preferably paraffinic oils), waxes (preferably a paraffinic waxes), processing aids (for example, stearates and fluoropolymers) and tackifiers (for example, hydrocarbons, rosins and terpenes).

The term "radiated" or "irradiated" as used herein means the elastic composition or the shaped article comprised of the elastic composition was subjected to at least 3 megarads (or the equivalent thereof) of radiation dosage whether or not there was a measurable decrease in percent xylene extractables (that is, increase in insoluble gel). That is, substantial crosslinking may not result from the irradiation.

The terms "crosslinked" and "substantially crosslinked" as used herein mean the elastic composition or the shaped article comprised of the elastic composition is characterized as having xylene extractables of less than or equal to 70 weight percent (that is, greater than or equal to 30 weight percent gel content), preferably less than or equal to 40 weight percent (that is, greater than or equal to 60 weight percent gel content), where xylene extractables (and gel content) are determined in accordance with ASTM D-2765.

The terms "cured" and "substantially cured" as used herein means the elastic composition or the shaped article comprised of the elastic composition was subjected or exposed to a treatment which induced crosslinking. As used herein, the terms relate to the use of a grafted silane compound.

The terms "curable" and "crosslinkable" as used herein mean the elastic composition or the shaped article comprised of the elastic composition is not crosslinked and has not

been subjected or exposed to treatment which induces crosslinking although the elastic composition or the shaped article comprised of the elastic composition comprises additive(s) or functionality which will effectuate crosslinking upon subjection or exposure to such treatment.

The term "pro-rad additive" as used herein means a compound which is not activated during normal fabrication or processing of the elastic composition, but can be activated by the application of temperatures (heat) substantial above normal fabrication or processing temperatures or ionizing energy (or both) to effectuate some measurable gelation or preferably, substantial crosslinking.

Substantially hydrogenated block copolymers comprise at least one distinct block of a hydrogenated polymerized vinyl aromatic monomer and at least one block of a hydrogenated polymerized conjugated diene monomer. Preferred substantially hydrogenated block polymers are triblock comprising (before hydrogenation) two vinyl aromatic monomer unit blocks and one conjugated diene monomer unit block. Suitable substantially hydrogenated block polymers for use in the present invention are generally characterized by:

- a) a weight ratio of conjugated diene monomer unit block to vinyl aromatic monomer unit block before hydrogenation of greater than 60:40
- b) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000 (preferably, especially for high drawdown application such as, for example, fiber spinning, less than or equal to 81,000), wherein each vinyl aromatic monomer unit block (A) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit block (B) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and



c) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.


Neat substantially hydrogenated block polymers can be further characterized as having a viscosity at 0.1 rad/sec and 190°C, as determined using a parallel plate rheometer (Rheometrics RMS-800 equipped with 25 mm diameter flat plates at 1.5 mm gap under a nitrogen purge), that is less than 1,000,000 poises, preferably less than or equal to 750,000 poises, more preferably less than 500,000 poises or that is at least 30 percent, preferably at least 50 percent, more preferably at least 80 lower than that of a partially hydrogenated block polymer having the same monomer types, number of monomer units, symmetry and weight average molecular weight, or that is defined by the following inequality:

$$\ln \text{ viscosity at } 0.1 \text{ rad/sec} \leq (7.08 \times 10^{-5}) (M_w) + 7.89$$

where "Ln" means natural log and " $\leq$ " means less than or equal to.

Neat substantially hydrogenated block polymers can also be further characterized as having a drawability of less than or equal to 200 denier, preferably less than or equal to 175 denier, more preferably less than or equal to 50 denier when fiber spun at 0.43 g/minute and 250°C using an Instron capillary rheometer equipped with a die having a 1,000 micron diameter and a 20:1  $L/D$ . The term "neat" is used herein to mean unblended with other synthetic polymer.

The vinyl aromatic monomer is typically a monomer of the formula:



wherein R' is hydrogen or alkyl, Ar is phenyl, halophenyl, alkylphenyl, alkylhalophenyl, naphthyl, pyridinyl, or anthracenyl, wherein any alkyl group contains 1 to 6 carbon atoms which may be mono or multisubstituted with functional groups such as halo, nitro, amino, hydroxy, cyano, carbonyl and carboxyl. More preferably Ar is phenyl or alkyl phenyl with phenyl being most preferred. Typical vinyl aromatic monomers include styrene, alpha-methylstyrene, all isomers of vinyl toluene, especially para-vinyl toluene, all isomers of ethyl styrene, propyl styrene, butyl styrene, vinyl biphenyl, vinyl naphthalene, vinyl anthracene and mixtures thereof.

The block copolymer can contain more than one specific polymerized vinyl aromatic monomer. In other words, the block copolymer can contain a polystyrene block and a poly-alpha-methylstyrene block. The hydrogenated vinyl aromatic block may also be a copolymer, wherein the hydrogenated vinyl aromatic portion is at least 50 weight percent of the copolymer.

The conjugated diene monomer can be any monomer having 2 conjugated double bonds. Such monomers include for example 1,3-butadiene, 2-methyl-1,3-butadiene, 2-methyl-1,3-pentadiene, isoprene and similar compounds, and mixtures thereof. The block copolymer can contain more than one specific polymerized conjugated diene monomer. In other words, the block copolymer can contain a polybutadiene block and a polyisoprene block.

The conjugated diene polymer block can comprise materials that remain amorphous after the hydrogenation process, or materials which are capable of crystallization after hydrogenation. Hydrogenated polyisoprene blocks remain amorphous, while hydrogenated polybutadiene blocks can be

either amorphous or crystallizable depending upon their structure. Polybutadiene can contain either a 1,2 configuration, which hydrogenates to give the equivalent of a 1-butene repeat unit, or a 1,4-configuration, which hydrogenates to give the equivalent of an ethylene repeat unit. Polybutadiene blocks having at least approximately 40 weight percent 1,2-butadiene content, based on the weight of the polybutadiene block, provides substantially amorphous blocks with low glass transition temperatures upon hydrogenation. Polybutadiene blocks having less than approximately 40 weight percent 1,2-butadiene content, based on the weight of the polybutadiene block, provide crystalline blocks upon hydrogenation. Depending on the final application of the polymer it may be desirable to incorporate a crystalline block (to improve solvent resistance) or an amorphous, more compliant block. In some applications, the block copolymer can contain more than one conjugated diene polymer block, such as a polybutadiene block and a polyisoprene block. The conjugated diene polymer block may also be a copolymer of a conjugated diene, wherein the conjugated diene portion of the copolymer is at least 50 weight percent of the copolymer. The conjugated diene polymer block may also be a copolymer of more than one conjugated diene, such as a copolymer of butadiene and isoprene.

Other polymeric blocks may also be included in the substantially hydrogenated block polymers used in the present invention.

A "block" is herein defined as a polymeric segment of a copolymer which exhibits microphase separation from a structurally or compositionally different polymeric segment of the copolymer. Microphase separation occurs due to the incompatibility of the polymeric segments within the block copolymer. The separation of block segments can be detected by the presence of distinct glass transition temperatures.

Microphase separation and block copolymers are generally discussed in "Block Copolymers-Designer Soft Materials", PHYSICS TODAY, February, 1999, pages 32-38.

Suitable substantially hydrogenated block polymers typically have a weight ratio of conjugated diene monomer unit block to vinyl aromatic monomer unit block before hydrogenation of from 60:40 to 95:5, preferably from 65:35 to 90:10, more preferably from 70:30 to 85:15, based on the total weight of the conjugated diene monomer unit and vinyl aromatic monomer unit blocks.

The total weights of the vinyl aromatic monomer unit block(s) and the conjugated diene monomer unit block(s) before hydrogenation is typically at least 80 weight percent, preferably at least 90, and more preferably at least 95 weight percent of the total weight of the hydrogenated block polymer. More specifically, the hydrogenated block polymer typically contains from 1 to 99 weight percent of a hydrogenated vinyl aromatic polymer (for example, polyvinylcyclohexane or PVCH block, generally from 10, preferably from 15, more preferably from 20, even more preferably from 25, and most preferably from 30 to 90 weight percent, preferably to 85 and most preferably to 80 percent, based on the total weight of the hydrogenated block polymer. And, as to the conjugated diene polymer block, the hydrogenated block copolymer typically contains from 1 to 99 weight percent of a hydrogenated conjugated diene polymer block, preferably from 10, more preferably from 15, and most preferably from 20 to 90 weight percent, typically to 85, preferably to 80, more preferably to 75, even more preferably to 70 and most preferably to 65 percent, based on the total weight of the copolymer.

The substantially hydrogenated block polymers suitable for use in the present invention are produced by the hydrogenation of block copolymers including triblock,

multiblock, tapered block, and star block polymers such as, for example, but not limited to, SBS, SBSBS, SIS, SISIS, and SISBS (wherein S is polystyrene, B is polybutadiene and I is polyisoprene). Preferred block polymers contain at least one  
5 block segment comprised of a vinyl aromatic polymer block, more preferably the block polymer is symmetrical such as, for example, a triblock with a vinyl aromatic polymer block on each end. The block polymers may, however, contain any  
10 number of additional blocks, wherein these blocks may be attached at any point to the triblock polymer backbone. Thus, linear blocks would include, for example, SBS, SBSB, SBSBS, and SBSBSB. That is, suitable block polymers include asymmetrical block polymers and tapered linear block  
15 polymers.

20 The block polymer can also be branched, wherein polymer chains are attached at any point along the polymer backbone. In addition, blends of any of the aforementioned block copolymers can also be used as well as blends of the block copolymers with their hydrogenated homopolymer counterparts. In other words, a hydrogenated SBS block polymer can be  
25 blended with a hydrogenated SBSBS block polymer or a hydrogenated polystyrene homopolymer or both. It should be noted here that in the production of triblock polymers, small amounts of residual diblock copolymers are often produced.

30 The weight average molecular weight ( $M_w$ ) of suitable substantially hydrogenated block polymers, as measured before hydrogenation, is generally from 30,000, preferably from 45,000, more preferably from 55,000 and most preferably from 60,000 to 150,000, typically to 140,000, generally to  
35 135,000, preferably to 130,000, more preferably to 125,000, and most preferably to 120,000. But preferably, especially when used neat for fiber melt spinning purposes, the weight average molecular weight before hydrogenation will be less than or equal to 81,500, more preferably less than or equal  
40 to 75,000 and most preferably less than or equal to 60,500.

Substantially hydrogenated block polymers can have vinyl aromatic monomer unit block with weight average molecular weights,  $M_w$ , before hydrogenation of from 6,000, especially from 9,000, more especially from 11,000, and most especially from 12,000 to 45,000, especially to 35,000, more especially to 25,000 and most especially to 20,000. The weight average molecular weight of the conjugated diene monomer unit block before hydrogenation can be from 12,000, especially from 27,000, more especially from 33,000 and most especially from 36,000 to 110,000, especially to 100,000, more especially to 90,000 and most especially to 80,000. But preferably, especially when used neat for fiber melt spinning purposes, for triblocks comprising two hydrogenated vinyl aromatic monomer unit blocks and one hydrogenated conjugated diene monomer unit block, the weight average molecular weight of each vinyl aromatic monomer unit block before hydrogenation will be less than or equal to 15,000, more preferably less than or equal to 13,000 and most preferably less than or equal to 12,000.

It is important to note that each individual block of the hydrogenated block copolymer of the present invention, can have its own distinct molecular weight. In other words, for example, two vinyl aromatic polymer blocks may each have a different molecular weight.

$M_p$  and  $M_w$ , as used to throughout the specification, are determined using gel permeation chromatography (GPC). The molecular weight of the substantially hydrogenated block polymer and properties obtained are dependent upon the molecular weight of each of the monomer unit blocks. For substantially hydrogenated block polymers, molecular weights are determined by comparison to narrow polydispersity homopolymer standards corresponding to the different monomer unit segments (for example, polystyrene and polybutadiene standards are used for SBS block copolymers) with adjustments based on the composition of the block copolymer. Also for

example, for a triblock copolymer composed of styrene (S) and butadiene (B), the copolymer molecular weight can be obtained by the following equation:

5 
$$\ln M_c = x \ln M_a + (1-x) \ln M_b$$

where  $M_c$  is the molecular weight of the copolymer,  $x$  is the weight fraction of S in the copolymer,  $M_a$  is the apparent molecular based on the calibration for S homopolymer and  $M_b$  is the apparent molecular weight based on the calibration for homopolymer B. This method is described in detail by L.H. Tung, Journal of Applied Polymer Science, volume 24, 953, 1979.

Methods of making block polymers are well known in the art. Typically, block polymers are made by anionic polymerization, examples of which are cited in Anionic Polymerization: Principles and Practical Applications, H.L. Hsieh and R.P. Quirk, Marcel Dekker, New York, 1996. Block polymers can be made by sequential monomer addition to a carbanionic initiator such as sec-butyl lithium or n-butyl lithium. Block polymers can also be made by coupling a triblock material with a divalent coupling agent such as 1,2-dibromoethane, dichlorodimethylsilane, or phenylbenzoate. In this method, a small chain (less than 10 monomer repeat units) of a conjugated diene monomer can be reacted with the vinyl aromatic monomer unit coupling end to facilitate the coupling reaction. Note, however, vinyl aromatic polymer blocks are typically difficult to couple, therefore, this technique is commonly used to achieve coupling of the vinyl aromatic polymer ends. The small chain of the conjugated diene monomer unit does not constitute a distinct block since no microphase separation is achieved.

Coupling reagents and strategies which have been demonstrated for a variety of anionic polymerizations are discussed in Hsieh and Quirk, Chapter 12, pgs. 307-331. In another method, a difunctional anionic initiator is used to initiate the polymerization from the center of the block

system, wherein subsequent monomer additions add equally to both ends of the growing polymer chain. An example of a, such a difunctional initiator is 1,3-bis(1-phenylethenyl) benzene treated with organolithium compounds, as described in U.S  
5 Patents 4,200,718 and 4,196,154.

After preparation of the block polymer, the polymer is hydrogenated to remove sites of unsaturation in both the conjugated diene monomer unit block(s) and the vinyl aromatic monomer unit block(s) of the polymer. Any method of  
10 hydrogenation can be used where suitable methods typically include the use of metal catalysts supported on an inorganic substrate, such as Pd on BaSO<sub>4</sub> (U.S. Patent 5,352,744) and Ni on kieselguhr (U.S. Patent 3,333,024). Additionally, soluble, homogeneous catalysts such those prepared from  
15 combinations of transition metal salts of 2-ethylhexanoic acid and alkyl lithiums can be used to fully saturate block copolymers, as described in Die Makromolekulare Chemie, Volume 160, pp. 291, 1972.

Hydrogenation can also be achieved using hydrogen and a  
20 heterogeneous catalyst such as those described in U.S. Patents 5,352,744; 5,612,422 and 5,645,253. The catalysts described therein are heterogeneous catalysts consisting of a metal crystallite supported on a porous silica substrate. An example of a silica supported catalyst which is especially  
25 useful in the polymer hydrogenation is a silica which has a surface area of at least 10 m<sup>2</sup>/g which is synthesized such that it contains pores with diameters ranging between 3000 and 6000 Angstroms. This silica is then impregnated with a metal capable of catalyzing hydrogenation of the polymer,  
30 such as nickel, cobalt, rhodium, ruthenium, palladium, platinum, other Group VIII metals, combinations or alloys thereof. Other heterogeneous catalysts can also be used, having average pore diameters in the range of 500 to 3,000 Angstroms.



The level of hydrogenation of the substantially hydrogenated block polymers used in the present invention is greater than 95 percent for the conjugated diene monomer unit block(s) and greater than 90 percent for the vinyl aromatic monomer unit block(s), preferably greater than 99 percent for the conjugated diene monomer unit block(s) and greater than 95 percent for the vinyl aromatic monomer unit block(s), more preferably greater than 99.5 percent for the conjugated diene monomer unit block(s) and greater than 98 percent for the vinyl aromatic monomer unit block(s), and most preferably greater than 99.9 percent for the conjugated diene monomer unit block(s) and 99.5 percent for the vinyl aromatic monomer unit block(s).

The term "level of hydrogenation" refers to the percentage of the original unsaturated bonds that become saturated upon hydrogenation. The level of hydrogenation for the (hydrogenated) vinyl aromatic monomer unit block(s) can be determined using UV-VIS spectrophotometry, while the level of hydrogenation for the (hydrogenated) diene conjugated monomer unit block(s) can be determined using proton NMR.

The block polymer composition (that is, ratio of conjugated diene monomer unit blocks to vinyl aromatic monomer unit blocks) can be determined using proton NMR and a comparative integration technique such as that described by Santee, Chang and Morton in Journal of Polymer Science: Polymer Letter Edition, Vol. 11, page 449 (1973). Conveniently, a Varian Inova NMR unit set at 300 MHz for  $^1\text{H}$  is used and samples of the block polymer are analyzed as 4 percent solutions (w/v) in  $\text{CDCl}_3$  (deuteriochloroform).

Individual block lengths can be calculated from the weight average molecular weight,  $M_w$ , and  $^1\text{H}$  NMR compositional analysis and by assuming a symmetrical structure (for example, a triblock with terminal polystyrene blocks).

In the practice of the present invention, curing, irradiation or crosslinking of the elastic composition or articles comprising the elastic composition can be

accomplished by any means known in the art, including, but not limited to, electron-beam irradiation, beta irradiation, X-rays, gamma irradiation, controlled thermal heating, corona irradiation, peroxides, allyl compounds and UV radiation with or without crosslinking catalyst. Electron-beam irradiation is the preferred technique for crosslinking the substantially hydrogenated block polymer or the shaped article comprised of the substantially hydrogenated block polymer. Preferably, the curing, irradiation, crosslinking or combination thereof provides a percent gel, as determined using xylene in accordance with ASTM D-2765, of greater than or equal to 40 weight percent, more preferably greater than or equal to 50 weight percent, most preferably greater than or equal to 70 weight percent.

Suitable electron-beam irradiation equipment is available from Energy Services, Inc. Wilmington, Mass. with capabilities of at least 100 kilo-electron volts (KeV) and at least 5 kilowatts (Kw). Preferably, electrons are employed up to 70 megarads dosages. The irradiation source can be any electron beam generator operating in a range of 150 KeV to 6 mega-electron volts (MeV) with a power output capable of supplying the desired dosage. The electron voltage can be adjusted to appropriate levels which may be, for example, 100,000, 300,000, 1,000,000 or 2,000,000 or 3,000,000 or 6,000,000 or higher or lower. Many other apparati for irradiating polymeric materials are known in the art. The irradiation is usually carried out at a dosage between 3 megarads to 35 megarads, preferably between 8 to 30 megarads, more preferably between 8 to 20 megarads. Further, the irradiation can be carried out conveniently at room temperature, although higher and lower temperatures, for example 0°C to 60°C, may also be employed.

The irradiation can be carried out on-line (that is, during fabrication of the article), off-line (such as after fabrication of the article, for example, film, by unwinding or wrapping the fabricated article or co-spooled articles).

the case of fibers and filaments). Preferably, the irradiation is carried out after shaping or fabrication of the article. Also, in a preferred embodiment, a pro-rad additive is incorporated into the elastic composition and the composition is subsequently irradiated with electron beam radiation at 8 to 30 megarads.

In another aspect of the invention, the irradiation (preferably electron beam irradiation) is carried out under an inert atmosphere. Suitable atmospheres can be provided by the use of helium, argon, or nitrogen. Substantial improvements in high temperature serviceability can be gained by using an inert atmosphere without any attendant substantial loss in elastic performance ordinarily associated with service or use at elevated temperatures.

Crosslinking can be promoted with a crosslinking catalyst, and any catalyst that will provide this function can be used. Suitable catalysts generally include organic bases, carboxylic acids, and organometallic compounds including organic titanates and complexes or carboxylates of lead, cobalt, iron, nickel, zinc and tin. Dibutyltindilaurate, dioctyltinmaleate, dibutyltindiacetate, dibutyltindiocetate, stannous acetate, stannous octoate, lead naphthenate, zinc caprylate, and cobalt naphthenate. Tin carboxylate, especially dibutyltindilaurate and dioctyltinmaleate, are particularly effective for this invention. The catalyst (or mixture of catalysts) is present in a catalytic amount, typically between 0.015 and 0.035 phr.

Representative pro-rad additives include, but are not limited to, azo compounds, organic peroxides and polyfunctional vinyl or allyl compounds such as, for example, triallyl cyanurate, triallyl isocyanurate, pentaerythritol tetramethacrylate, glutaraldehyde, ethylene glycol dimethacrylate, diallyl maleate, dipropargyl maleate, dipropargyl monoallyl cyanurate, dicumyl peroxide, di-tert-butyl peroxide, t-butyl perbenzoate, benzoyl peroxide, cumene hydroperoxide, t-butyl peracetate, methyl ethyl ketone


peroxide, 2,5-dimethyl-2,5-di(t-butyl peroxy)hexane, lauryl peroxide, tert-butyl peracetate, azobisisobutyl nitrite and combination thereof. Preferred pro-rad additives for use in the present invention are compounds which have poly-  
 5 functional (that is, at least two) moieties such as C=C, C=N or C=O.

At least one pro-rad additive can be introduced to the ethylene interpolymer by any method known in the art. However, preferably the pro-rad additive(s) is introduced via  
 10 a masterbatch concentrate comprising the same or different base resin as the ethylene interpolymer. Preferably, the pro-rad additive concentration for the masterbatch is relatively high, for example, greater than or equal to 25 weight percent (based on the total weight of the  
 15 concentrate).

The at least one pro-rad additive is introduced to the ethylene polymer in any effective amount. Preferably, the at least one pro-rad additive introduction amount is from 0.001 to 5 weight percent, more preferably from 0.005 to 2.5 weight  
 20 percent and most preferably from 0.015 to 1 weight percent (based on the total weight of the substantially hydrogenated block polymer).

The elastic composition, substantially hydrogenated block polymer or any blend component of the elastic  
 25 composition may be crosslinked or cured by first grafting a silane onto its polymer backbone and thereafter subjecting or exposing the silane grafted ethylene interpolymer to water or atmospheric moisture. Preferably, the silane grafted polymer is subjected or exposed to water or atmospheric moisture  
 30 after a shaping or fabrication operation.

Suitable silanes for silane crosslinking of the elastic composition or its components include those of the general formula



in which R' is a hydrogen atom or methyl group; x and y are 0 or 1 with the proviso that when x is 1, y is 1; n is an integer from 1 to 12 inclusive, preferably 1 to 4, and each R  
5 independently is a hydrolyzable organic group such as an alkoxy group having from 1 to 12 carbon atoms (for example, methoxy, ethoxy, butoxy), aryloxy group (for example, phenoxy), araloxy group (for example, benzyloxy), aliphatic acyloxy group having from 1 to 12 carbon atoms (for example,  
10 formyloxy, acetyloxy, propanoyloxy), amino or substituted amino groups (alkylamino, arylamino), or a lower alkyl group having 1 to 6 carbon atoms inclusive, with the proviso that not more than one of the three R groups is an alkyl.

Suitable silanes may be grafted to a substantially  
15 hydrogenated block polymer or any blend component of the elastic composition by the use of a suitable quantity of organic peroxide, either before or during a shaping or fabrication operation. However, preferably, the silane is grafted onto a ethylene interpolymer blend component before  
20 shaping or fabrication operations. In any case, the curing or crosslinking reaction takes place following the shaping or fabrication operation by reaction between the grafted silane groups and water. The water permeating into the bulk polymer from the atmosphere or from a water bath or "sauna". The  
25 phase of the process during which the crosslinks are created is commonly referred to as the "cure phase" and the process itself is commonly referred to as "curing".

Any silane that effectively grafts to and crosslinks the elastic composition or its blend components can be used in  
30 the present invention. Suitable silanes include unsaturated silanes that comprise an ethylenically unsaturated hydrocarb<sup>yl</sup> group, such as a vinyl, allyl, isopropenyl, butenyl, cyclohexenyl or  $\gamma$ -(meth)acryloxy allyl group, and a hydrolyzable group, such as, for example, a hydrocarbyloxy,  
35 hydrocarbonyloxy, or hydrocarbylamino group. Examples of hydrolyzable groups include methoxy, ethoxy, formyloxy, acetoxy, propionyloxy, and alkyl or arylamino groups.

Preferred silanes are the unsaturated alkoxy silanes which can be grafted onto the polymer. These silanes and their method of preparation are more fully described in USP 5,266,627 to Meverden, et al. Vinyl trimethoxy silane, vinyl triethoxy silane,  $\gamma$ -(meth)acryloxy propyl trimethoxy silane and mixtures of these silanes are the preferred silane crosslinkers for use in this invention. If a filler is present, then preferably the crosslinker includes vinyl triethoxy silane.

The amount of silane crosslinker used in the present invention can vary widely depending several factors such as the silane itself, processing conditions, grafting efficiency, organic peroxide selection, the ultimate application, and similar factors. However, typically at least 0.5, preferably at least 0.7, parts per hundred resin (phr) is used. Considerations of convenience and economy are usually the two principal limitations on the maximum amount of silane crosslinker used, and typically the maximum amount of silane crosslinker does not exceed 5, preferably it does not exceed 2, phr. As used in parts per hundred resin or phr, "resin" means the ethylene interpolymer.

The silane crosslinker is grafted to the elastic composition itself or a blend component of the elastic composition by any conventional method, typically in the presence of a free radical initiator, for example, peroxides and azo compounds, or by ionizing radiation, etc. A suitable grafting method is disclosed in WO 95/29197.

But, for efficient silane grafting, organic initiators are preferred, such as any one of the peroxide initiators, for example, dicumyl peroxide, di-tert-butyl peroxide, t-butyl perbenzoate, benzoyl peroxide, cumene hydroperoxide, t-butyl peroctoate, methyl ethyl ketone peroxide, 2,5-dimethyl-2,5-di(t-butyl peroxy)hexane, lauryl peroxide, and tert-butyl peracetate. A suitable azo compound is azobisisobutyl nitrite. The amount of initiator can vary, but it is typically present in an amount of at least 0.04, preferably

at least 0.06, phr. Typically, the initiator does not exceed 0.15, preferably it does not exceed 0.10, phr. The ratio of silane crosslinker to initiator also can vary widely, but the typical crosslinker:initiator ratio is between 10:1 and 30:1, preferably between 18:1 and 24:1.

While any conventional method can be used to graft the silane crosslinker to the elastic composition or its blend component, one preferred method is to blend the two with the initiator in the first stage of a reactor extruder, such as a Buss kneader. The grafting conditions can vary, but the melt temperatures are typically between 160°C and 260°C, preferably between 190 and 230°C, depending upon the residence time and the half life of the initiator.

In addition to at least one substantially hydrogenated block polymer, the inventive elastic composition can optionally be made from or comprises a blend of a substantially hydrogenated block polymer and another polymeric material. Suitable polymeric materials for blending with a substantially hydrogenated block polymer include, but are not limited to, polyolefins, thermoplastic polyurethanes, polycarbonates, polyamides, polyethers, poly/vinyl chloride polymers, poly/vinylidene chloride polymers, polyesters, polymers that contain lactide acid residuals and partially or non-hydrogenated block polymers.

Preferred polymeric materials for blending with a substantially hydrogenated block polymer are other elastic polymers, such as, for example, but not limited to, a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/styrene interpolymer, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin interpolymer, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin/conjugated diene interpolymer, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic copolyester (e.g. Hytrel™ from Dupont and Arnitel™ from Akzo), a partially hydrogenated block polymer, an elastic

polyamide, a styrene/conjugated diene interpolymers, and an elastomeric metallocene-catalyzed synthetic polymer

But the most preferred blends are those comprised of a substantially hydrogenated block polymer and a polyolefin elastomer or plastomer, especially a polyolefin elastomer or plastomer made using a single-site metallocene catalyst system (for example, a homogeneously branched ethylene polymer such as a substantially linear ethylene interpolymers or a homogeneously branched linear ethylene interpolymers). Blends of a substantially hydrogenated block polymer and a polyolefin elastomer or plastomer have been discovered to exhibit unexpected synergistic processing/mechanical performance properties compared to either resins. In particular, blends of substantially hydrogenated block polymer and a polyolefin elastomer or plastomer show surprisingly improved tenacity at break and elastic recovery at greater than 30 weight percent additions of substantially hydrogenated block polymer.

Blends with a polypropylene polymer are also preferred, especially ternary blends that include a homogeneously branched ethylene polymer, for the preparation of fiber-containing fabrics that are processable at high stretching level as well as at high stretching rates. See, for example, US provisional patent application, filed March 27, 2000, under the Attorney Docket No. 60269, in the names of Rexford Maugans et al. which describes polypropylene/ethylene polymer compositions that are referred to herein as "an enhanced polypropylene polymer".

Generally suitable polyolefins for blending include, for example, polyethylene (ethylene homopolymer), polystyrene, ethylene/alpha-olefin interpolymers, alpha-olefin homopolymers, such as polypropylene(propylene homopolymer), alpha-olefin interpolymers, such as interpolymers of polypropylene and an alpha-olefin having at least 4 carbon atoms.

Representative polyolefins include, for example, but are



not limited to, substantially linear ethylene polymers, homogeneously branched linear ethylene polymers, heterogeneously branched linear ethylene (including linear low density polyethylene (LLDPE), ultra or very low density polyethylene (ULDPE or VLDPE) medium density polyethylene (MDPE) and high density polyethylene (HDPE)), high pressure low density polyethylene (LDPE), ethylene/acrylic acid (EAA) copolymers, ethylene/methacrylic acid (EMAA) copolymers, ethylene/acrylic acid (EAA) ionomers, ethylene/methacrylic acid (EMAA) ionomers, ethylene/vinyl acetate (EVA) copolymers, ethylene/vinyl alcohol (EVOH) copolymers, polypropylene homopolymers and copolymers, ethylene/propylene polymers, ethylene/styrene interpolymers, graft-modified polymers (for example, maleic anhydride grafted polyethylene such as LLDPE g-MAH), ethylene acrylate copolymers (for example, ethylene/ethyl acrylate (EEA) copolymers, ethylene/methyl acrylate (EMA), and ethylene/methmethacrylate (EMMA) copolymers), polybutylene (PB), ethylene carbon monoxide interpolymer (for example, ethylene/carbon monoxide (ECO), copolymer, ethylene/acrylic acid/carbon monoxide (EAACO) terpolymer, ethylene/methacrylic acid/carbon monoxide (EMAACO) terpolymer, ethylene/vinyl acetate/carbon monoxide (EVACO) terpolymer and styrene/carbon monoxide (SCO)), chlorinated polyethylene and mixtures thereof.

As indicated above, ethylene/vinyl aromatic interpolymers may be used in the present invention. Preferred ethylene/vinyl aromatic interpolymers are substantially random ethylene/vinyl aromatic interpolymers, especially substantially random ethylene/styrene interpolymers. Representative of substantially random ethylene/vinyl aromatic interpolymers are substantially random ethylene/styrene interpolymers preferably containing at least 20, more preferably equal to or greater than 30, and most preferably equal to or greater than 50 weight percent interpolymerized styrene monomer.

A substantially random interpolymer comprises in ,  
polymerized form i) one or more  $\alpha$ -olefin monomers and ii) one  
or more vinyl or vinylidene aromatic monomers and/or one or  
more sterically hindered aliphatic or cycloaliphatic vinyl or  
5 vinylidene monomers, and optionally iii) other polymerizable  
ethylenically unsaturated monomer(s).

The term "interpolymer" is used herein to indicate a  
polymer wherein at least two different monomers are  
polymerized to make the interpolymer.

10 The term "substantially random" in the substantially  
random interpolymer resulting from polymerizing i) one or  
more  $\alpha$ -olefin monomers and ii) one or more vinyl or  
vinylidene aromatic monomers and/or one or more sterically  
hindered aliphatic or cycloaliphatic vinyl or vinylidene  
15 monomers, and optionally iii) other polymerizable  
ethylenically unsaturated monomer(s) as used herein generally  
means that the distribution of the monomers of said  
interpolymer can be described by the Bernoulli statistical  
model or by a first or second order Markovian statistical  
20 model, as described by J. C. Randall in Polymer Sequence  
Determination, Carbon-13 NMR Method, Academic Press New York,  
1977, pp. 71-78. Preferably, the substantially random  
interpolymer resulting from polymerizing one or more  $\alpha$ -olefin  
monomers and one or more vinyl or vinylidene aromatic  
25 monomers, and optionally other polymerizable ethylenically  
unsaturated monomer(s), does not contain more than 15 percent  
of the total amount of vinyl or vinylidene aromatic monomer  
in blocks of vinyl or vinylidene aromatic monomer of more  
than 3 units. More preferably, the interpolymer is not  
30 characterized by a high degree of either isotacticity or  
syndiotacticity. This means that in the carbon-13 NMR  
spectrum of the substantially random interpolymer, the peak  
areas corresponding to the main chain methylene and methine  
carbons representing either meso diad sequences or racemic  
35 diad sequences should not exceed 75 percent of the total peak  
area of the main chain methylene and methine carbons.

By the subsequently used term "substantially random interpolymer" it is meant a substantially random interpolymer produced from the above-mentioned monomers.

Suitable  $\alpha$ -olefin monomers which are useful for preparing the substantially random interpolymer include, for example,  $\alpha$ -olefin monomers containing from 2 to 20, preferably from 2 to 12, more preferably from 2 to 8 carbon atoms. Preferred such monomers include ethylene, propylene, butene-1, 4-methyl-1-pentene, hexene-1 and octene-1. Most preferred are ethylene or a combination of ethylene with  $C_3$ - $C_8$   $\alpha$ -olefins. These  $\alpha$ -olefins do not contain an aromatic moiety.


Suitable vinyl or vinylidene aromatic monomers which can be employed to prepare the substantially random interpolymer include, for example, those represented by the following formula I



wherein  $R^1$  is selected from the group of radicals consisting of hydrogen and alkyl radicals containing from 1 to 4 carbon atoms, preferably hydrogen or methyl; each  $R^2$  is independently selected from the group of radicals consisting of hydrogen and alkyl radicals containing from 1 to 4 carbon atoms, preferably hydrogen or methyl; Ar is a phenyl group or a phenyl group substituted with from 1 to 5 substituents; selected from the group consisting of halo,  $C_1$ - $C_4$ -alkyl, and  $C_1$ - $C_4$ -haloalkyl; and n has a value from zero to 4, preferably from zero to 2, most preferably zero. Particularly suitable such monomers include styrene and lower alkyl- or halogen-substituted derivatives thereof. Exemplary monovinyl or monovinylidene aromatic monomers include styrene, vinyl

toluene,  $\alpha$ -methylstyrene, t-butyl styrene or chlorostyrene, including all isomers of these compounds. Preferred monomers include styrene,  $\alpha$ -methyl styrene, the lower alkyl-(C<sub>1</sub>-C<sub>4</sub>) or phenyl-ring substituted derivatives of styrene, such as for  
 5 example, ortho-, meta-, and para-methylstyrene, the ring halogenated styrenes, para-vinyl toluene or mixtures thereof. A more preferred aromatic monovinyl monomer is styrene.

By the term "sterically hindered aliphatic or cycloaliphatic vinyl or vinylidene monomers", it is meant  
 10 addition polymerizable vinyl or vinylidene monomers corresponding to the formula:



15 wherein A<sup>1</sup> is a sterically bulky, aliphatic or cycloaliphatic substituent of up to 20 carbons, R<sup>1</sup> is selected from the group of radicals consisting of hydrogen and alkyl radicals containing from 1 to 4 carbon atoms, preferably hydrogen or  
 20 methyl; each R<sup>2</sup> is independently selected from the group of radicals consisting of hydrogen and alkyl radicals containing from 1 to 4 carbon atoms, preferably hydrogen or methyl; or alternatively R<sup>1</sup> and A<sup>1</sup> together form a ring system.

By the term "sterically bulky" is meant that the monomer  
 25 bearing this substituent is normally incapable of addition polymerization by standard Ziegler-Natta polymerization catalysts at a rate comparable with ethylene polymerizations.

$\alpha$ -Olefin monomers containing from 2 to 20 carbon atoms and having a linear aliphatic structure such as propylene,  
 30 butene-1, hexene-1 and octene-1 are not considered as sterically hindered aliphatic monomers. Preferred sterically hindered aliphatic or cycloaliphatic vinyl or vinylidene compounds are monomers in which one of the carbon atoms bearing ethylenic unsaturation is tertiary or quaternary  
 35 substituted. Examples of such substituents include cyclic aliphatic groups such as cyclohexyl, cyclohexenyl,

cyclooctenyl, or ring alkyl or aryl substituted derivatives thereof, tert-butyl or norbornyl. Most preferred sterically hindered aliphatic or cycloaliphatic vinyl or vinylidene compounds are the various isomeric vinyl-ring substituted derivatives of cyclohexene and substituted cyclohexenes, and 5-ethylidene-2-norbornene. Especially suitable are 1-, 3-, and 4-vinylcyclohexene.

The substantially random interpolymers usually contain, from 0.5 to 65, preferably from 1 to 55, more preferably from 2 to 50 mole percent of at least one vinyl or vinylidene aromatic monomer and/or sterically hindered aliphatic or cycloaliphatic vinyl or vinylidene monomer and from 35 to 99.5, preferably from 45 to 99, more preferably from 50 to 98 mole percent of at least one aliphatic  $\alpha$ -olefin having from 2 to 20 carbon atoms.

Other optional polymerizable ethylenically unsaturated monomer(s) include strained ring olefins such as norbornene and C<sub>1</sub>-C<sub>10</sub>-alkyl or C<sub>6</sub>-C<sub>10</sub>-aryl substituted norbornenes, with an exemplary substantially random interpolymer being ethylene/styrene/norbornene.

The most preferred substantially random interpolymers are interpolymers of ethylene and styrene and interpolymers of ethylene, styrene and at least one  $\alpha$ -olefin containing from 3 to 8 carbon atoms.

The number average molecular weight ( $M_n$ ) of the substantially random interpolymers is usually greater than 5,000, preferably from 20,000 to 1,000,000, more preferably from 50,000 to 500,000. The glass transition temperature ( $T_g$ ) of the substantially random interpolymers is preferably from -40°C to +35°C, preferably from 0°C to +30°C, most preferably from +10°C to +25°C, measured according to differential mechanical scanning (DMS).

The substantially random interpolymers may be modified by typical grafting, hydrogenation, functionalizing, or other reactions well known to those skilled in the art. The

polymers may be readily sulfonated or chlorinated to provide functionalized derivatives according to established techniques. The substantially random interpolymers may also be modified by various chain extending or crosslinking processes including, but not limited to peroxide-, silane-, sulfur-, radiation-, or azide-based cure systems. A full description of the various crosslinking technologies is described in copending US Patent Application Nos. 08/921,641 and 08/921,642, both filed on August 27, 1997.

Dual cure systems, which use a combination of heat, moisture cure, and radiation steps, may also be effectively employed. Dual cure systems are disclosed and claimed in US Patent Application Serial No. 536,022, filed on September 29, 1995, in the names of K. L. Walton and S. V. Karande. For instance, it may be desirable to employ peroxide crosslinking agents in conjunction with silane crosslinking agents, peroxide crosslinking agents in conjunction with radiation, or sulfur-containing crosslinking agents in conjunction with silane crosslinking agents.


The substantially random interpolymers may also be modified by various crosslinking processes including, but not limited to the incorporation of a diene component as a termonomer in its preparation and subsequent crosslinking by the aforementioned methods and further methods including vulcanization via the vinyl group using sulfur for example as the cross linking agent.

One suitable method for manufacturing substantially random ethylene/vinyl aromatic interpolymers includes polymerizing a mixture of polymerizable monomers in the presence of one or more metallocene or constrained geometry catalysts in combination with various cocatalysts, as described in EP-A-0,416,815 by James C. Stevens et al. and US Patent No. 5,703,187 by Francis J. Timmers. Preferred operating conditions for such polymerization reactions include pressures from atmospheric up to 3000 atmospheres and temperatures from -500°C to 100°C. Polymerization and

unreacted monomer removal at temperatures above the auto-polymerization temperature of the respective monomers may result in formation of some amounts of homopolymer polymerization products resulting from free radical polymerization.

Examples of suitable catalysts and methods for preparing the substantially random interpolymers are disclosed in U.S. Application No. 702,475, filed May 20, 1991 (EP-A-514,828); as well as U.S. Patent Nos.: 5,055,438; 5,057,475; 5,096,867; 5,064,802; 5,132,380; 5,189,192; 5,321,106; 5,347,024; 5,350,723; 5,374,696; 5,399,635; 5,470,993; 5,703,187; and 5,721,185.

The substantially random ethylene/ vinyl aromatic interpolymers can also be prepared by the methods described in JP 07/278230 employing compounds shown by the general formula



Where Cp<sup>1</sup> and Cp<sup>2</sup> are cyclopentadienyl groups, indenyl groups, fluorenyl groups, or substituents of these, independently of each other; R<sup>1</sup> and R<sup>2</sup> are hydrogen atoms, halogen atoms, hydrocarbon groups with carbon numbers of 1-12, alkoxyl groups, or aryloxyl groups, independently of each other; M is a group IV metal, preferably Zr or Hf, most preferably Zr; and R<sup>3</sup> is an alkylene group or silanediyl group used to crosslink Cp<sup>1</sup> and Cp<sup>2</sup>.


The substantially random ethylene/ vinyl aromatic interpolymers can also be prepared by the methods described by John G. Bradfute et al. (W. R. Grace & Co.) in WO 95/32095; by R. B. Pannell (Exxon Chemical Patents, inc.) in WO 94/00500; and in *Plastics Technology* p. 25 (September 1992).

Also suitable are the substantially random interpolymers which comprise at least one *o*-chlorovinyl aromatic vinyl

aromatic/ $\alpha$ -olefin tetrad disclosed in U. S. Application No. 08/708,869, filed September 4, 1996, and WO 98/09999, both by Francis J. Timmers et al. These interpolymers contain additional signals in their carbon-13 NMR spectra with intensities greater than three times the peak to peak noise. These signals appear in the chemical shift range 43.70 - 44.25 ppm and 38.0 - 38.5 ppm. Specifically, major peaks are observed at 44.1, 43.9, and 38.2 ppm. A proton test NMR experiment indicates that the signals in the chemical shift region 43.70 - 44.25 ppm are methine carbons and the signals in the region 38.0 - 38.5 ppm are methylene carbons.

It is believed that these new signals are due to sequences involving two head-to-tail vinyl aromatic monomer insertions preceded and followed by at least one  $\alpha$ -olefin insertion, for example, an ethylene/styrene/styrene/ethylene tetrad wherein the styrene monomer insertions of said tetrads occur exclusively in a 1,2 (head to tail) manner. It is understood by one skilled in the art that for such tetrads involving a vinyl aromatic monomer other than styrene and an  $\alpha$ -olefin other than ethylene that the ethylene/vinyl aromatic monomer/vinyl aromatic monomer/ethylene tetrad will give rise to similar carbon-13 NMR peaks but with slightly different chemical shifts.

These interpolymers can be prepared by conducting the polymerization at temperatures of from -30°C to 250°C in the presence of such catalysts as those represented by the formula:




wherein each  $C_p$  is independently, each occurrence, a substituted cyclopentadienyl group  $\pi$ -bound to M; E is C or Si; M is a group IV metal, preferably Zr or Hf, most preferably Zr; each R is independently, each occurrence, H,



hydrocarbyl, silahydrocarbyl, or hydrocarbylsilyl, containing up to 30, preferably from 1 to 20, more preferably from 1 to 10 carbon or silicon atoms; each R' is independently, each occurrence, H, halo, hydrocarbyl, hydrocarbyloxy, silahydrocarbyl, hydrocarbylsilyl containing up to 30, preferably from 1 to 20, more preferably from 1 to 10 carbon or silicon atoms or two R' groups together can be a C<sub>1</sub>-C<sub>10</sub> hydrocarbyl substituted 1,3-butadiene; M is 1 or 2; and optionally, but preferably in the presence of an activating cocatalyst.

Particularly, suitable substituted cyclopentadienyl groups include those illustrated by the formula:



wherein each R is independently, each occurrence, H, hydrocarbyl, silahydrocarbyl, or hydrocarbylsilyl, containing up to 30, preferably from 1 to 20, more preferably from 1 to 10 carbon or silicon atoms or two R groups together form a divalent derivative of such group. Preferably, R independently each occurrence is (including where appropriate all isomers) hydrogen, methyl, ethyl, propyl, butyl, pentyl, hexyl, benzyl, phenyl or silyl or (where appropriate) two such R groups are linked together forming a fused ring system such as indenyl, fluorenyl, tetrahydroindenyl, tetrahydrofluorenyl, or octahydrofluorenyl.

Particularly preferred catalysts include, for example, racemic-(dimethylsilanediyl)-bis-(2-methyl-4-phenylindenyl) zirconium dichloride, racemic-(dimethylsilanediyl)-bis-(2-methyl-4-phenylindenyl) zirconium 1,4diphenyl-1,3-butadiene, racemic-(dimethylsilanediyl)-bis-(2-methyl-4-phenylindenyl) zirconium di-C<sub>1</sub>-C<sub>4</sub> alkyl, racemic-(dimethylsilanediyl)-bis-(2-methyl-4-phenylindenyl) zirconium di-C<sub>1</sub>-C<sub>4</sub> alkoxide, or any combination thereof.

It is also possible to use the following titanium-based constrained geometry catalysts, [n-(1,1-dimethylethyl)-1,1-dimethyl-1-[(1,2,3,4,5-  $\eta$ )-1,5,6,7-tetrahydro-s-indacen-1-yl]silanaminato(2-)-n]titanium dimethyl; (1-indenyl)(tert-butylamido)dimethyl-silane titanium dimethyl; ((3-tert-butyl)(1,2,3,4,5-  $\eta$ )-1-indenyl):(tert-butylamido)dimethylsilane titanium dimethyl; and ((3-isopropyl)(1,2,3,4,5-  $\eta$ )-1-indenyl)(tert-butylamido)dimethylsilane titanium dimethyl, or any combination thereof.

Further preparative methods for the interpolymers used in the present invention have been described in the literature. Longo and Grassi (Makromol. Chem. Volume 191, pages 2387 to 2396 [1990]) and D'Anniello et al. (Journal of Applied Polymer Science, Volume 58, pages 1701-1706 [1995]) reported the use of a catalytic system based on methylaluminoxane (MAO) and cyclopentadienyl-titanium trichloride ( $\text{CpTiCl}_3$ ) to prepare an ethylene-styrene copolymer. Xu and Lin (Polymer Preprints Am. Chem. Soc., Div. Polym. Chem.), Volume 35, pages 686,687 [1994]) have reported copolymerization using a  $\text{MgCl}_2/\text{TiCl}_4/\text{NdCl}_3/\text{Al}(\text{iBu})_3$  catalyst to give random copolymers of styrene and propylene. Lu et al (Journal of Applied Polymer Science, Volume 53, pages 1453 to 1460 [1994]) have described the copolymerization of ethylene and styrene using a  $\text{TiCl}_4/\text{NdCl}_3/\text{MgCl}_2/\text{Al}(\text{Et})_3$  catalyst. Sernetz and Mulhaupt, (Macromol. Chem. Phys., V. 197, pp. 1071-1083, 1997) have described the influence of polymerization conditions on the copolymerization of styrene with ethylene using  $\text{Me}_2\text{Si}(\text{Me}_4\text{Cp})(\text{n-tert-butyl})\text{TiCl}_2/\text{Methylaluminoxane}$  Ziegler-Natta catalysts. Copolymers of ethylene and styrene produced by bridged metallocene catalysts have been described by Arai, Toshiaki and Suzuki (Polymer Preprints Am. Chem. Soc., Div. Polym. Chem.), Volume 38, pages 349, 350 [1997]) and in U.S. Patent No. 5,652,315, issued to Mitsui Toatsu Chemicals, Inc.

Also, the manufacture of  $\alpha$ -olefin/vinyl aromatic monomer  
interpolymers such as propylene/styrene and butene/styrene  
are described in U.S. Patent No. 5,244,996, issued to Mitsui  
Petrochemical Industries Ltd. or U.S. Patent No. 5,652,315  
5 also issued to Mitsui Petrochemical Industries Ltd. or as  
disclosed in DE 197 11339 A1 to Denki Kagaku Kogyo KK.  
Moreover, although of high isotacticity and therefore not  
"substantially random", the random copolymers of ethylene and  
styrene as disclosed in Polymer Preprints, Vol. 39, no. 1,  
10 March 1998 by Toru Aria et al. can also be employed as the  
ethylene polymer of the present invention.

While preparing the substantially random interpolpolymer,  
an amount of atactic vinyl aromatic homopolymer may be formed  
due to homopolymerization of the vinyl aromatic monomer at  
15 elevated temperatures. The presence of vinyl aromatic  
homopolymer is in general not detrimental for the purposes of  
the present invention and can be tolerated. The vinyl  
aromatic homopolymer may be separated from the interpolpolymer,  
if desired, by extraction techniques such as selective  
20 precipitation from solution with a non-solvent for either the  
interpolymer or the vinyl aromatic homopolymer.  
Nevertheless, for the purpose of the present invention, it is  
preferred that no more than 30 weight percent, preferably  
less than 20 weight percent (based on the total weight of the  
25 interpolymers) of atactic vinyl aromatic homopolymer be is  
present.

Suitable sulfonated ethylene/styrene interpolymers for  
use in the present invention are described in WO 99/20691.

Suitable reactive tailored liquid polyurethanes for use  
30 in the present invention are described in WO 99/16806.

Suitable hydroxyl functionalized polyethers and hydroxyl  
functionalized polyetheramines for use in the present  
invention are known in the art. See, for example, U.S.  
Patent No. 5,275,853 and WO 00/1750.

35 The preferred polymeric material for blending with a  
substantially hydrogenated block polymer is a polyether.

elastomer or plastomer characterized as having a DSC ,  
crystallinity of less than 45 weight percent, preferably, less  
than 30 weight percent, more preferably less than or equal to  
20 weight percent, and most preferably less than or equal 16 .  
5 percent.

Preferably, the polyolefin elastomer or plastomer is  
characterized as having a melt index ( $I_2$ ) less than 5,000 g/10  
minutes, more preferably less than 500 g/10 minutes, most ,  
preferably less than or equal to 50 g/10 minutes, as  
10 determined in accordance with ASTM D-1238, Condition  
190°C/2.16 kilogram (kg).

Also, preferably the polymeric material used for  
blending with the substantially hydrogenated block polymer is  
characterized as having a percent permanent set of less than  
15 75 at 23°C, preferably less than or equal 60 at 23°C, more  
preferably less than or equal to 30 at 23°C and most  
preferably less than or equal to 15 at 23°C and 38°C and 200  
percent strain when measured at a 2 mil (0.051 mm) thickness  
using an Instron tensiometer; or preferably a percent set  
20 elongation of less than or equal to 25, more preferably 20,  
most preferably 15 at 23°C and 100 percent strain.

The term "polymer", as used herein, refers to a  
polymeric compound prepared by polymerizing monomers, whether  
of the same or a different type. As used herein, generic  
25 term "polymer" embraces the terms "homopolymer," "copolymer,"  
"terpolymer" as well as "interpolymer."

The term "interpolymer", as used herein refers to  
polymers prepared by the polymerization of at least two  
different types of monomers. As used herein the generic term  
30 "interpolymer" includes the term "copolymers" (which is  
usually employed to refer to polymers prepared from two  
different monomers) as well as the term "terpolymers" (which  
is usually employed to refer to polymers prepared from three  
different types of monomers).

The term "homogeneously branched ethylene polymer" is used herein in the conventional sense to refer to an ethylene interpolymer in which the comonomer is randomly distributed within a given polymer molecule and wherein substantially all of the polymer molecules have the same ethylene to comonomer molar ratio. The term refers to an ethylene interpolymer that are manufactured using so-called homogeneous or single-site catalyst systems known in the art such Ziegler vanadium, hafnium and zirconium catalyst systems and metallocene catalyst systems, for example, a constrained geometry catalyst systems which is further described herein below.

Homogeneously branched ethylene polymers for use in the present invention can be also described as having less than 15 weight percent, preferably less 10 weight percent, more preferably less than 5 and most preferably zero (0) weight percent of the polymer with a degree of short chain branching less than or equal to 10 methyls/1000 carbons. That is, the polymer contains no measurable high density polymer fraction (for example, there is no fraction having a density of equal to or greater than 0.94 g/cm<sup>3</sup>), as determined, for example, using a temperature rising elution fractionation (TREF) technique and infrared or <sup>13</sup>C nuclear magnetic resonance (NMR) analysis.

Preferably, the homogeneously branched ethylene polymer is characterized as having a narrow, essentially single melting TREF profile/curve and essentially lacking a measurable high density polymer portion, as determined using a temperature rising elution fractionation technique (abbreviated herein as "TREF").

The composition distribution of an ethylene interpolymer can be readily determined from TREF as described, for example, by Wild et al., Journal of Polymer Science, Poly. Phys. Ed., Vol. 20, p. 441 (1982), or in US Patent 4,798,081; 5,008,204; or by L. D. Cady, "The Role of Comonomer Type and Distribution in LLDPE Product Performance," SPE Regional Technical Conference, Quebec Square Hilton, Akron, Ohio,

October 1-2, pp. 107-119 (1985).

The composition (monomer) distribution of the interpolymer can also be determined using  $^{13}\text{C}$  NMR analysis in accordance with techniques described in US Patent No.

5 5,292,845; US Patent No. 4,798,081; U.S. Patent No. 5,089,321 and by J. C. Randall, Rev. Macromol. Chem. Phys., C29, pp. 201-317 (1989).

In analytical temperature rising elution fractionation analysis (as described in US Patent No. 4,798,081 and  
10 abbreviated herein as "ATREF"), the film or composition to be analyzed is dissolved in a suitable hot solvent (for example, trichlorobenzene) and allowed to crystallize in a column containing an inert support (stainless steel shot) by slowly  
15 reducing the temperature. The column is equipped with both a refractive index detector and a differential viscometer (DV) detector. An ATREF-DV chromatogram curve is then generated by eluting the crystallized polymer sample from the column by slowly increasing the temperature of the eluting solvent  
(trichlorobenzene). The ATREF curve is also frequently  
20 called the short chain branching distribution (SCBD) or composition distribution (CD) curve, since it indicates how evenly the comonomer (for example, octene) is distributed throughout the sample in that as elution temperature decreases, comonomer content increases. The refractive index  
25 detector provides the short chain distribution information and the differential viscometer detector provides an estimate of the viscosity average molecular weight. The composition distribution and other compositional information can also be determined using crystallization analysis fractionation such  
30 as the CRYSTAF fractional analysis package available commercially from PolymerChar, Valencia, Spain.

Preferred homogeneously branched ethylene polymers (such as, but not limited to, substantially linear ethylene  
polymers) have a single melting peak between  $-30$  and  $150^\circ\text{C}$ , as  
35 determined using differential scanning calorimetry (DSC), as opposed to traditional Ziegler-Natta polymerized heterogeneously

branched ethylene polymers (for example, LLDPE and ULDPE or VLDPE) which have two or more melting points.

The single melting peak is determined using a differential scanning calorimeter standardized with indium and deionized water. The method involves 5-7 mg sample sizes, a "first heat" to 180°C which is held for 4 minutes, a cool down at 10°C/min. to -30°C which is held for 3 minutes, and heat up at 10°C/min. to 150°C to provide a "second heat" heat flow vs. temperature curve from which the melting peak(s) is obtained. Total heat of fusion of the polymer is calculated from the area under the curve.

The homogeneously branched ethylene polymers for use in the invention can be either a substantially linear ethylene polymer or a homogeneously branched linear ethylene polymer.

The term "linear" as used herein means that the ethylene polymer does not have long chain branching. That is, the polymer chains comprising the bulk linear ethylene polymer have an absence of long chain branching, as in the case of traditional linear low density polyethylene polymers or linear high density polyethylene polymers made using Ziegler polymerization processes (for example, USP 4,076,698 (Anderson et al.)), sometimes called heterogeneous polymers. The term "linear" does not refer to bulk high pressure branched polyethylene, ethylene/vinyl acetate copolymers, or ethylene/vinyl alcohol copolymers which are known to those skilled in the art to have numerous long chain branches.

The term "homogeneously branched linear ethylene polymer" refers to polymers having a narrow short chain branching distribution and an absence of long chain branching. Such "linear" uniformly branched or homogeneous polymers include those made as described in USP 3,645,992 (Elston) and those made using so-called single site catalysts in a batch reactor having relatively high ethylene concentrations (as described in U.S. Patent 5,026,798 (Canich) or in U.S. Patent 5,055,438 (Canich)) or those made using constrained geometry catalysts in a batch reactor also

having relatively high olefin concentrations (as described in U.S. Patent 5,064,802 (Stevens et al.) or in EP 0 416 815 A2 (Stevens et al.)).

Typically, homogeneously branched linear ethylene  
5 polymers are ethylene/ $\alpha$ -olefin interpolymers, wherein the  $\alpha$ -olefin is at least one  $C_3$ - $C_{20}$   $\alpha$ -olefin (for example, propylene, 1-butene, 1-pentene, 4-methyl-1-pentene, 1-hexene, and 1-octene) and preferably the at least one  $C_3$ - $C_{20}$   $\alpha$ -olefin is 1-butene, 1-hexene or 1-octene. Most preferably, the  
10 ethylene/ $\alpha$ -olefin interpolymers are copolymers of ethylene and a  $C_3$ - $C_{20}$   $\alpha$ -olefin, and especially an ethylene/ $C_4$ - $C_8$   $\alpha$ -olefin copolymer such as an ethylene/1-octene copolymer, ethylene/1-butene copolymer, ethylene/1-pentene copolymer or ethylene/1-hexene copolymer.

15 Suitable homogeneously branched linear ethylene polymers for use in the invention are sold under the designation of TAFMER by Mitsui Chemical Corporation and under the designations of EXACT and EXCEED resins by Exxon Chemical Company.

20 The term "substantially linear ethylene polymer" as used herein means that the bulk ethylene polymer is substituted, on average, with 0.01 long chain branches/1000 total carbons to 3 long chain branches/1000 total carbons (wherein "total carbons" includes both backbone and branch carbons).

25 Preferred polymers are substituted with 0.01 long chain branches/1000 total carbons to 1 long chain branches/1000 total carbons, more preferably from 0.05 long chain branches/1000 total carbons to 1 long chain branches/1000 total carbons, and especially from 0.3 long chain  
30 branches/1000 total carbons to 1 long chain branches/1000 total carbons.

As used herein, the term "backbone" refers to a discrete molecule, and the term "polymer" or "bulk polymer" refers, in the conventional sense, to the polymer as formed in a  
35 reactor. For the polymer to be a "substantially linear



ethylene polymer", the polymer must have at least enough molecules with long chain branching such that the average long chain branching in the bulk polymer is at least an average of from 0.01/1000 total carbons to 3 long chain  
5 branches/1000 total carbons.

The term "bulk polymer" as used herein means the polymer which results from the polymerization process as a mixture of polymer molecules and, for substantially linear ethylene polymers, includes molecules having an absence of long chain  
10 branching as well as molecules having long chain branching. Thus a "bulk polymer" includes all molecules formed during polymerization. It is understood that, for the substantially linear polymers, not all molecules have long chain branching, but a sufficient amount do such that the average long chain  
15 branching content of the bulk polymer positively affects the melt rheology (that is, the shear viscosity and melt fracture properties) as described herein below and elsewhere in the literature.

Long chain branching (LCB) is defined herein as a chain  
20 length of at least one (1) carbon less than the number of carbons in the comonomer, whereas short chain branching (SCB) is defined herein as a chain length of the same number of carbons in the residue of the comonomer after it is incorporated into the polymer molecule backbone. For  
25 example, a substantially linear ethylene/1-octene polymer has backbones with long chain branches of at least seven (7) carbons in length, but it also has short chain branches of only six (6) carbons in length.

Long chain branching can be distinguished from short  
30 chain branching by using  $^{13}\text{C}$  nuclear magnetic resonance (NMR) spectroscopy and to a limited extent, for example, for ethylene homopolymers, it can be quantified using the method of Randall, (Rev. Macromol.Chem. Phys., C29 (2&3), p. 285-297 (1989)). However as a practical matter, current  $^{13}\text{C}$  nuclear  
35 magnetic resonance spectroscopy cannot determine the length of a long chain branch in excess of about six (6) carbon

atoms and as such, this analytical technique cannot distinguish between a seven (7) carbon branch and a seventy (70) carbon branch. The long chain branch can be as long as about the same length as the length of the polymer backbone.

5 Although conventional  $^{13}\text{C}$  nuclear magnetic resonance spectroscopy cannot determine the length of a long chain branch in excess of six carbon atoms, there are other known techniques useful for quantifying or determining the presence of long chain branches in ethylene polymers, including  
10 ethylene/1-octene interpolymers. For example, US Patent No. 4,500,648 teaches that long chain branching frequency (LCB) can be represented by the equation  $\text{LCB} = b/M_w$  wherein  $b$  is the weight average number of long chain branches per molecule and  $M_w$  is the weight average molecular weight. The molecular  
15 weight averages and the long chain branching characteristics are determined by gel permeation chromatography and intrinsic viscosity methods, respectively.

Two other useful methods for quantifying or determining the presence of long chain branches in ethylene polymers,  
20 including ethylene/1-octene interpolymers are gel permeation chromatography coupled with a low angle laser light scattering detector (GPC-LALLS) and gel permeation chromatography coupled with a differential viscometer detector (GPC-DV). The use of these techniques for long  
25 chain branch detection and the underlying theories have been well documented in the literature. See, for example, Zimm, G.H. and Stockmayer, W.H., J. Chem. Phys., 17, 1301 (1949) and Rudin, A., Modern Methods of Polymer Characterization, John Wiley & Sons, New York (1991) pp. 103-112.

30 A. Willem deGroot and P. Steve Chum, both of The Dow Chemical Company, at the October 4, 1994 conference of the Federation of Analytical Chemistry and Spectroscopy Society (FACSS) in St. Louis, Missouri, presented data demonstrating that GPC-DV is indeed a useful technique for quantifying the  
35 presence of long chain branches in substantially linear ethylene polymers. In particular, deGroot and Chum found

that the level of long chain branches in substantially linear ethylene homopolymer samples measured using the Zimm-Stockmayer equation correlated well with the level of long chain branches measured using  $^{13}\text{C}$  NMR.

5 Further, deGroot and Chum found that the presence of octene does not change the hydrodynamic volume of the polyethylene samples in solution and, as such, one can account for the molecular weight increase attributable to octene short chain branches by knowing the mole percent  
10 octene in the sample. By deconvoluting the contribution to molecular weight increase attributable to 1-octene short chain branches, deGroot and Chum showed that GPC-DV may be used to quantify the level of long chain branches in substantially linear ethylene/octene copolymers.

15 DeGroot and Chum also showed that a plot of  $\text{Log}(I_2, \text{melt index})$  as a function of  $\text{Log}(\text{GPC Weight Average Molecular Weight})$  as determined by GPC-DV illustrates that the long chain branching aspects (but not the extent of long branching) of substantially linear ethylene polymers are  
20 comparable to that of high pressure, highly branched low density polyethylene (LDPE) and are clearly distinct from ethylene polymers produced using Ziegler-type catalysts such as titanium complexes and ordinary homogeneous catalysts such as hafnium and vanadium complexes.

25 For substantially linear ethylene polymers, the empirical effect of the presence of long chain branching is manifested as enhanced rheological properties which are quantified and expressed in terms of gas extrusion rheometry (GER) results and/or melt flow,  $I_{10}/I_2$ , increases.

30 The substantially linear ethylene polymers used in the present invention are a unique class of compounds that are further defined in US Patent No. 5,272,236, application number 07/776,130, filed October 15, 1991; US Patent No. 5,278,272, application number 07/939,281, filed September 2,  
35 1992; and US Patent No. 5,665,800, application number 08/536,760, filed October 10, 1996.

Substantially linear ethylene polymers differ significantly from the class of polymers conventionally known as homogeneously branched linear ethylene polymers described above and, for example, by Elston in US Patent 3,645,992. As an important distinction, substantially linear ethylene polymers do not have a linear polymer backbone in the conventional sense of the term "linear" as is the case for homogeneously branched linear ethylene polymers.

Substantially linear ethylene polymers also differ significantly from the class of polymers known conventionally as heterogeneously branched traditional Ziegler polymerized linear ethylene interpolymers (for example, ultra low density polyethylene, linear low density polyethylene or high density polyethylene made, for example, using the technique disclosed by Anderson et al. in US Patent 4,076,698) in that substantially linear ethylene interpolymers are homogeneously branched polymers. Further, substantially linear ethylene polymers also differ from the class of heterogeneously branched ethylene polymers in that substantially linear ethylene polymers are characterized as essentially lacking a measurable high density or crystalline polymer fraction as determined using a temperature rising elution fractionation technique.

The substantially linear ethylene elastomers and plastomers for use in the present invention is characterized as having

- (a) melt flow ratio,  $I_{10}/I_2 \geq 5.63$ ,
- (b) a molecular weight distribution,  $M_w/M_n$ , as determined by gel permeation chromatography and defined by the equation:  
$$(M_w/M_n) \leq (I_{10}/I_2) - 4.63,$$
- (c) a gas extrusion rheology such that the critical shear rate at onset of surface melt fracture for the substantially linear ethylene polymer is at least 50 percent greater than the critical shear

- rate at the onset of surface melt fracture for a linear ethylene polymer, wherein the substantially linear ethylene polymer and the linear ethylene polymer comprise the same comonomer or comonomers, the linear ethylene polymer has an  $I_2$  and  $M_w/M_n$  within ten percent of the substantially linear ethylene polymer and wherein the respective critical shear rates of the substantially linear ethylene polymer and the linear ethylene polymer are measured at the same melt temperature using a gas extrusion rheometer,
- (d) a single differential scanning calorimetry, DSC, melting peak between  $-30^\circ$  and  $150^\circ\text{C}$ , and
- (e) a density less than or equal to  $0.865\text{ g/cm}^3$ .

Determination of the critical shear rate and critical shear stress in regards to melt fracture as well as other rheology properties such as "rheological processing index" (PI), is performed using a gas extrusion rheometer (GER).

- The gas extrusion rheometer is described by M. Shida, R.N. Shroff and L.V. Cancio in Polymer Engineering Science, Vol. 17, No. 11, p. 770 (1977) and in Rheometers for Molten Plastics by John Dealy, published by Van Nostrand Reinhold Co. (1982) on pp. 97-99.

- The processing index (PI) is measured at a temperature of  $190^\circ\text{C}$ , at nitrogen pressure of 2500 psig ( $176\text{ kg/cm}^2$ ) using a 0.0296 inch (752 micrometers) diameter (preferably a 0.0143 inch (363 micrometers) diameter die for high flow polymers, for example, 50 - 100  $I_2$  melt index or greater), 20:1 L/D die having an entrance angle of  $180^\circ$ . The GER processing index is calculated in millipoise units from the following equation:

$$\text{PI} = 2.15 \times 10^6 \text{ dyne/cm}^2 / (1000 \times \text{shear rate}),$$

where:  $2.15 \times 10^6 \text{ dyne/cm}^2$  (215 MPa) is the shear stress at 2500 psig ( $176\text{ kg/cm}^2$ ), and the shear rate is the

shear rate at the wall as represented by the following equation:

$$32 Q' / (60 \text{ sec/min}) (0.745) (\text{Diameter} \times 2.54 \text{ cm/in})^3,$$

where:

5             $Q'$  is the extrusion rate (gms/min),  
            0.745 is the melt density of polyethylene (gm/cm<sup>3</sup>),  
and

            Diameter is the orifice diameter of the capillary (inches).

10           The PI is the apparent viscosity of a material measured at apparent shear stress of  $2.15 \times 10^6$  dyne/cm<sup>2</sup> (215 MPa).

            For substantially linear ethylene polymers, the PI is less than or equal to 70 percent of that of a conventional linear ethylene polymer having an  $I_2$ ,  $M_w/M_n$  and density each  
15 within ten percent of the substantially linear ethylene polymer.

            An apparent shear stress vs. apparent shear rate plot is used to identify the melt fracture phenomena over a range of nitrogen pressures from 5250 to 500 psig (369 to 35 kg/cm<sup>2</sup>)  
20 using the die or GER test apparatus previously described. According to Ramamurthy in Journal of Rheology, 30(2), 337-357, 1986, above a certain critical flow rate, the observed extrudate irregularities may be broadly classified into two main types: surface melt fracture and gross melt  
25 fracture.

            Surface melt fracture occurs under apparently steady flow conditions and ranges in detail from loss of specular gloss to the more severe form of "sharkskin". In this disclosure, the onset of surface melt fracture is  
30 characterized at the beginning of losing extrudate gloss at which the surface roughness of extrudate can only be detected by 40x magnification. The critical shear rate at onset of surface melt fracture for the substantially linear ethylene polymers is at least 50 percent greater than the critical  
35 shear rate at the onset of surface melt fracture of a linear ethylene polymer having about the same  $I_2$  and  $M_w/M_n$ .

Preferably, the critical shear stress at onset of surface melt fracture for the substantially linear ethylene polymers used in the invention is greater than  $2.8 \times 10^6$  dyne/cm<sup>2</sup> (280 MPa).

5        Gross melt fracture occurs at unsteady flow conditions and ranges in detail from regular (alternating rough and smooth, helical, etc.) to random distortions. For commercial acceptability, (for example, in blown film products), surface defects should be minimal, if not absent. The critical shear  
10       rate at onset of surface melt fracture (OSMF) and critical shear stress at onset of gross melt fracture (OGMF) will be used herein based on the changes of surface roughness and configurations of the extrudates extruded by a GER. For the substantially linear ethylene polymers used in the invention,  
15       the critical shear stress at onset of gross melt fracture is preferably greater than  $4 \times 10^6$  dyne/cm<sup>2</sup> (400 MPa).

For the processing index determination and for the GER melt fracture determination, substantially linear ethylene polymers are tested without inorganic fillers and do not have  
20       more than 20 ppm (parts per million) aluminum catalyst residue. Preferably, however, for the processing index and melt fracture tests, substantially linear ethylene polymers do contain antioxidants such as phenols, hindered phenols, phosphites or phosphonites, preferably a combination of a  
25       phenol or hindered phenol and a phosphite or a phosphonite.

The molecular weights and molecular weight distributions are determined by gel permeation chromatography (GPC). A suitable unit is a Waters 150C high temperature chromatographic unit equipped with a differential  
30       refractometer and three columns of mixed porosity where columns are supplied by Polymer Laboratories and are commonly packed with pore sizes of  $10^3$ ,  $10^4$ ,  $10^5$  and  $10^6$  Å. For ethylene polymers, the unit operating temperature is 140°C and the solvent is 1,2,4-trichlorobenzene, from which 0.3 percent by  
35       weight solutions of the samples are prepared for injection. Conversely, for the substantially hydrogenated linear

polymers, the unit operating temperature is 25°C and tetrahydrofuran is used as the solvent. A suitable flow rate is 1.0 milliliters/minute and the injection size is typically 100 microliters.

5 For the ethylene polymers where used in the present invention, the molecular weight determination with respect to the polymer backbone is deduced by using narrow molecular weight distribution polystyrene standards (from Polymer Laboratories) in conjunction with their elution volumes. The  
10 equivalent polyethylene molecular weights are determined by using appropriate Mark-Houwink coefficients for polyethylene and polystyrene (as described by Williams and Ward in Journal of Polymer Science, Polymer Letters, Vol. 6, p. 621, 1968) to derive the following equation:

15 
$$M_{\text{polyethylene}} = a * (M_{\text{polystyrene}})^b.$$

In this equation,  $a = 0.4316$  and  $b = 1.0$ . Weight average molecular weight,  $M_w$ , is calculated in the usual manner according to the following formula:  $M_j = (\sum w_i (M_i^j))^j$ . Where  
20  $w_i$  is the weight fraction of the molecules with molecular weight  $M_i$  eluting from the GPC column in fraction  $i$  and  $j = 1$  when calculating  $M_w$  and  $j = -1$  when calculating  $M_n$ .

For the at least one homogeneously branched ethylene polymer used in the present invention, the  $M_w/M_n$  is preferably less than 3.5, more preferably less than 3.0, most preferably  
25 less than 2.5, and especially in the range of from 1.5 to 2.5 and most especially in the range from 1.8 to 2.3.

Substantially linear ethylene polymers are known to have excellent processability, despite having a relatively narrow molecular weight distribution (that is, the  $M_w/M_n$  ratio is  
30 typically less than 3.5). Surprisingly, unlike homogeneously and heterogeneously branched linear ethylene polymers, the melt flow ratio ( $I_{10}/I_2$ ) of substantially linear ethylene polymers can be varied essentially independently of the molecular weight distribution,  $M_w/M_n$ . Accordingly, especially  
35 when good extrusion processability is desired, the preferred



ethylene polymer for use in the present invention is a homogeneously branched substantially linear ethylene interpolpolymer.

Suitable constrained geometry catalysts for use  
5 manufacturing substantially linear ethylene polymers include constrained geometry catalysts as disclosed in U.S. application number 07/545,403, filed July 3, 1990; U.S. application number 07/758,654, filed September 12, 1991; U.S. Patent No. 5,132,380 (application number 07/758,654); U.S.  
10 Patent No. 5,064,802 (application number 07/547,728); U.S. Patent No. 5,470,993 (application number 08/241,523); U.S. Patent No. 5,453,410 (application number 08/108,693); U.S. Patent No. 5,374,696 (application number 08/08,003); U.S. Patent No. 5,532,394 (application number 08/295,768); U.S.  
15 Patent No. 5,494,874 (application number 08/294,469); and U.S. Patent No. 5,189,192 (application number 07/647,111).

Suitable catalyst complexes may also be prepared according to the teachings of WO 93/08199, and the patents issuing therefrom. Further, the monocyclopentadienyl  
20 transition metal olefin polymerization catalysts taught in USP 5,026,798 are also believed to be suitable for use in preparing the polymers of the present invention, so long as the polymerization conditions substantially conform to those described in US Patent No. 5,272,236; US Patent No. 5,278,272  
25 and US Patent No. 5,665,800, especially with strict attention to the requirement of continuous polymerization. Such polymerization methods are also described in PCT/US 92/08812 (filed October 15, 1992).

The foregoing catalysts may be further described as  
30 comprising a metal coordination complex comprising a metal of groups 3-10 or the Lanthanide series of the Periodic Table of the Elements and a delocalize  $\beta$ -bonded moiety substituted with a constrain-inducing moiety, said complex having a constrained geometry about the metal atom such that the angle  
35 at the metal between the centroid of the delocalized, substituted  $\pi$ -bonded moiety and the center of at least one

remaining substituent is less than such angle in a similar complex containing a similar pi-bonded moiety lacking in such constrain-inducing substituent, and provided further that for such complexes comprising more than one delocalized,

- 5 substituted pi-bonded moiety, only one thereof for each metal atom of the complex is a cyclic, delocalized, substituted pi-bonded moiety. The catalyst further comprises an activating cocatalyst.

Suitable cocatalysts for use herein include polymeric or  
10 oligomeric aluminoxanes, especially methyl aluminoxane, as well as inert, compatible, noncoordinating, ion forming compounds. So-called modified methyl aluminoxane (MMAO) is also suitable for use as a cocatalyst. One technique for preparing such modified aluminoxane is disclosed in US Patent  
15 No. 5,041,584. Aluminoxanes can also be made as disclosed in US Patent No. 5,218,071; US Patent No. 5,086,024; US Patent No. 5,041,585; US Patent No. 5,041,583; US Patent No. 5,015,749; US Patent No. 4,960,878; and US Patent No. 4,544,762.

20 Aluminoxanes, including modified methyl aluminoxanes, when used in the polymerization, are preferably used such that the catalyst residue remaining in the (finished) polymer is preferably in the range of from 0 to 20 ppm aluminum, especially from 0 to 10 ppm aluminum, and more preferably  
25 from 0 to 5 ppm aluminum. In order to measure the bulk polymer properties (for example, PI or melt fracture), aqueous HCl is used to extract the aluminoxane from the polymer. Preferred cocatalysts, however, are inert, noncoordinating, boron compounds such as those described in  
30 EP 520732.

Substantially linear ethylene are produced via a continuous (as opposed to a batch) controlled polymerization process using at least one reactor (for example, as disclosed in WO 93/07187, WO 93/07188, and WO 93/07189), but can also  
35 be produced using multiple reactors (for example, using a multiple reactor configuration as described in WO 93/07187).

at a polymerization temperature and pressure sufficient to produce the interpolymers having the desired properties. The multiple reactors can be operated in series or in parallel, with at least one constrained geometry catalyst employed in  
5 at least one of the reactors.

Substantially linear ethylene polymers can be prepared via the continuous solution, slurry, or gas phase polymerization in the presence of a constrained geometry catalyst, such as the method disclosed in EP 416,815-A. The  
10 polymerization can generally be performed in any reactor system known in the art including, but not limited to, a tank reactor(s), a sphere reactor(s), a recycling loop reactor(s) or combinations thereof, any reactor or all reactors operated partially or completely adiabatically, nonadiabatically or a  
15 combination of both. Preferably, a continuous loop-reactor solution polymerization process is used to manufacture the substantially linear ethylene polymer used in the present invention.

In general, the continuous polymerization required to  
20 manufacture substantially linear ethylene polymers may be accomplished at conditions well known in the prior art for Ziegler-Natta or Kaminsky-Sinn type polymerization reactions, that is, temperatures from 0 to 250°C and pressures from atmospheric to 1000 atmospheres (100 MPa). Suspension,  
25 solution, slurry, gas phase or other process conditions may be employed if desired.

A support may be employed in the polymerization, but preferably the catalysts are used in a homogeneous (that is, soluble) manner. It will, of course, be appreciated that the  
30 active catalyst system forms *in situ* if the catalyst and the cocatalyst components thereof are added directly to the polymerization process and a suitable solvent or diluent, including condensed monomer, is used in said polymerization process. It is, however, preferred to form the active  
35 catalyst in a separate step in a suitable solvent prior to adding the same to the polymerization mixture.

The substantially linear ethylene polymers used in the present invention are interpolymers of ethylene with at least one C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin and/or C<sub>4</sub>-C<sub>18</sub> diolefin. Copolymers of ethylene and an  $\alpha$ -olefin of C<sub>3</sub>-C<sub>20</sub> carbon atoms are especially preferred. The term "interpolymer" as discussed above is used herein to indicate a copolymer, or a terpolymer, where, at least one other comonomer is polymerized with ethylene or propylene to make the interpolymer.

Suitable unsaturated comonomers useful for polymerizing with ethylene include, for example, ethylenically unsaturated monomers, conjugated or non-conjugated dienes, polyenes, etc. Examples of such comonomers include C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefins such as propylene, isobutylene, 1-butene, 1-hexene, 1-pentene, 4-methyl-1-pentene, 1-heptene, 1-octene, 1-nonene, and 1-decene. Preferred comonomers include propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, 1-heptene, and 1-octene, and 1-octene is especially preferred. Other suitable monomers include styrene, halo- or alkyl-substituted styrenes, vinylbenzocyclobutane, 1,4-hexadiene, 1,7-octadiene, and naphthenics (for example, cyclopentene, cyclohexene and cyclooctene).

In one preferred embodiment, the substantially hydrogenated block polymer is blended with at least one polypropylene polymer. Suitable polypropylene polymers for use in the invention, including random block propylene ethylene polymers, are available from a number of manufacturers, such as, for example, Montell Polyolefins and Exxon Chemical Company. At Exxon, suitable polypropylene polymers are supplied under the designations ESCORENE and ACHIEVE.

Suitable poly lactic acid (PLA) polymers for use in the invention are well known in the literature (for example, see D. M. Bigg et al., "Effect of Copolymer Ratio on the Crystallinity and Properties of Polylactic Acid Copolymers", ANTEC '96, pp. 2028-2039; WO 90/01521; EP 0 515203A; and EP 0

748846A2). Suitable poly lactic acid polymers are supplied commercially by Cargill Dow under the designation EcoPLA.

Suitable thermoplastic polyurethane polymers for use in the invention are commercially available from The Dow  
5 Chemical Company under the designation PELLATHANE.

Suitable polyolefin carbon monoxide interpolymers can be manufactured using well known high pressure free-radical polymerization methods. However, they may also be manufactured using traditional Ziegler-Natta catalysis and  
10 even with the use of so-called homogeneous catalyst systems such as those described and referenced herein above.

Suitable free-radical initiated high pressure carbonyl-containing ethylene polymers such as ethylene acrylic acid interpolymers can be manufactured by any technique known in  
15 the art including the methods taught by Thomson and Waples in U.S. Patent No. 3,520,861 and by McKinney et al. in U.S. Nos. 4,988,781; 4,599,392; and 5,384,373.

Suitable ethylene vinyl acetate interpolymers for use in the invention are commercially available from various  
20 suppliers, including Exxon Chemical Company and Du Pont Chemical Company.

Suitable ethylene/alkyl acrylate interpolymers are commercially available from various suppliers. Suitable ethylene/acrylic acid interpolymers are commercially  
25 available from The Dow Chemical Company under the designation PRIMACOR. Suitable ethylene/methacrylic acid interpolymers are commercially available from Du Pont Chemical Company under the designation NUCREL.

Chlorinated polyethylene (CPE), especially chlorinated  
30 substantially linear ethylene polymers, can be prepared by chlorinating polyethylene in accordance with well known techniques. Preferably, chlorinated polyethylene comprises equal to or greater than 30 weight percent chlorine. Suitable chlorinated polyethylenes for use in the invention  
35 are commercially supplied by The Dow Chemical Company under the designation TYKON.

Additives, for example, Irgafos® 168 or Irganox®, 1010 supplied by Ciba Geigy Corp., may be added to the elastic composition and blends thereof to protect against undue degradation during shaping or fabrication operation or to better control the extent of grafting or crosslinking (that is, inhibit excessive gelation). In-process additives, for example, calcium stearate, water, and fluoropolymers may also be used for purposes such as for the deactivation of residual catalyst or for further improved processability.

In certain embodiments, especially at molecular weights greater than 81,500, at least one substantially hydrogenated block polymer is formulated with oil, wax, processing aid, plasticizer, or tackifier or all of these (that is, the inventive formulated system) for improved melt drawability and fiber spinnability.

The term "tackifier" as used herein means any of several compositions or compounds which tack or adhesiveness to polymer compositions. Representative classes of tackifiers include aliphatic C<sub>5</sub> resins, polyterpene resins, hydrogenated resins, mixed aliphatic-aromatic resins, rosin esters, and hydrogenated rosin esters. The tackifier employed will typically have a viscosity at 350°F, as measured using a Brookfield viscometer, of no more than 300, preferably no more than 150, and most preferably of no more than 50 centipoise. The tackifier employed will typically have a glass transition temperature greater than 50°C.

Suitable aliphatic tackifiers for use in the present invention include those available under the trade designations Escorez™, Piccotac™, Mercures™, Wingtack™, Hi-Rez™, Quintone™, and Tackirol™. Suitable polyterpene tackifiers include those available under the trade designations Nirez™, Piccolyte™, Wingtack™, and Zonarez™. Suitable hydrogenated tackifiers include those available under the trade designations Escorez™,

Arkon™, and Clearon™. Suitable mixed aliphatic-aromatic tackifiers include those available under the trade designations Escorez™, Regalite™, Hercures™, AR™, Imprez™, Norsolene™ M, Marukarez™, Arkon™ M, Quintone™, etc. Other tackifiers may be employed, provided they are compatible with the substantially hydrogenated block polymer.

The tackifier will be present in the formulated system of the invention in an amount less than 70 weight percent, preferably less than 50 weight percent, more preferably less than 25 weight percent and in some instances, less than 10 weight percent tackifiers may be employed.

The term "wax" is used herein to refer to paraffinic or crystalline polymers having a number average molecular weight less than 6000. Exemplary polymers falling within this category include ethylene homopolymers available from Petrolite, Inc. (Tulsa, OK) as Polywax™ 500, Polywax™ 1500 and Polywax™ 2000; and paraffinic waxes available from CP Hall under the product designations 1230, 1236, 1240, 1245, 1246, 1255, 1260, and 1262.

Polywax™ 2000 has a molecular weight of approximately 2000, an  $M_w/M_n$  of approximately 1.0, a density at 16°C of about 0.97 g/cm<sup>3</sup>, and a melting point of approximately 126°C.

CP Hall 1246 paraffinic wax is available from CP Hall (Stow, OH). CP Hall 1246 paraffinic wax has a melting point of 143°F, a Brookfield viscosity at 210°F of 4.2 centipoise, and a specific gravity at 73°F of 0.915.

Preferred waxes will be prepared using a constrained geometry catalyst. Such polymers will be either ethylene

homopolymers or interpolymers of ethylene and a comonomer such as, for example, C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefins, styrene, alkyl-substituted styrene, tetrafluoroethylene, vinylbenzocyclobutane, non-conjugated dienes, and naphthenics. Such polymers, in contrast to traditional waxes, will have an M<sub>w</sub>/M<sub>n</sub> of from 1.5 to 2.5, preferably from 1.8 to 2.2. Such polymers are disclosed and claimed in the application entitled "Ultra-Low Molecular Weight Ethylene Polymers", filed on January 22, 1996 as Provisional Application 60/010403 in the names of Finlayson, et al.

Suitable waxes for use in the formulated system have a number average molecular weight less than 6000, preferably less than 5000 and greater than 800, preferably greater than 1300.

Suitable ethylene polymer waxes, that is, an ethylene homopolymer (either a traditional ethylene homopolymer wax or an ethylene homopolymer prepared with a constrained geometry catalyst) or an interpolymer of ethylene and a comonomer selected from the group consisting of C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefins, non-conjugated dienes, and naphthenics, will have a density of at least 0.910 g/cm<sup>3</sup> and no more than 0.970 g/cm<sup>3</sup>, preferably no more than 0.965 g/cm<sup>3</sup>.

The term "oil" is used herein in its conventional sense to refer to fats, viscous liquids, and volatile liquids which are classified as mineral, vegetable, animal, essential or edible oil. When employed, oils will be present in an amount less than 25, preferably less than 15, and more preferably less than 10 weight percent, based on the weight of the hot melt adhesive. Exemplary oils include white mineral oil (such as Kaydol<sup>TM</sup> oil available from Witco), and Shellflex<sup>TM</sup> naphthenic oil (available from Shell Oil Company). Preferred oils are white mineral paraffinic oils such as, for



example, Witco 200 process oil supplied by Witco Chemical Corporation.

The elastic composition can be filled or unfilled. If filled, then the amount of filler present should not exceed  
5 an amount that would adversely affect elevated temperature elasticity. Typically, the amount of filler present is between 20 and 80, preferably between 50 and 70, weight percent (wt. percent) based on the total weight of the interpolymer. Representative fillers include kaolin clay,  
10 magnesium hydroxide, silica, calcium carbonate. In a preferred embodiment, in which a filler is present, the filler is coated with a material that will prevent or retard any tendency that the filler might otherwise have to interfere with the crosslinking reactions. Stearic acid is  
15 illustrative of such a filler coating.

The elastic composition and elastic shaped articles of the invention have utility in a variety of applications. Suitable applications include, for example, but are not limited to, disposable personal hygiene products (for  
20 example, training pants, diapers, absorbent underpants, incontinence products, and feminine hygiene items); disposable garments (for example, industrial apparel, coveralls, head coverings, underpants, pants, shirts, gloves, and socks); infection control/clean room products (for  
25 example, surgical gowns and drapes, face masks, head coverings, surgical caps and hood, shoe coverings, boot slippers, wound dressings, bandages, sterilization wraps, wipers, lab coats, coverall, pants, aprons, jackets, and bedding items and sheets) and sports apparel.

30 Various homofil fibers can be made from the elastic composition of the present invention, including staple fibers, spunbond fibers or melt blown fibers (using, for example, systems as disclosed in USP 4,340,563 (Appel et al.), USP 4,663,220 (Wisneski et al.), USP 4,668,566 (Braun), or USP  
35 4,322,027 (Reba)), and gel spun fibers (for example, the system disclosed in USP 4,413,110 (Gavesh et al.)). Staple

fibers can be melt spun (that is, they can be extruded into the final fiber diameter directly without additional drawing), or they can be melt spun into a higher diameter and subsequently hot or cold drawn to the desired diameter using conventional fiber drawing techniques.

Elastic staple fibers of the present invention can also be used as bonding fibers, especially where the inventive elastic fibers have a lower melting point than the surrounding matrix fibers. In a bonding fiber application, the bonding fiber is typically blended with other matrix fibers and the entire structure is subjected to heat, where the bonding fiber melts and bonds the surrounding matrix fiber. Typical matrix fibers which benefit from use of the inventive elastic fibers disclosed herein include, but are not limited to, poly(ethylene terephthalate) fibers, cotton fibers, nylon fibers, polypropylene fibers, heterogeneously branched polyethylene fibers, homogeneously branched ethylene polymer fibers, linear polyethylene homopolymer fibers and combinations thereof. The diameter of the matrix fiber can vary depending upon the end use application.

Bicomponent fibers can also be made from the novel elastic composition. Such bicomponent fibers have the elastic composition of the present invention in at least one portion of the fiber. For example, in a sheath/core bicomponent fiber (that is, one in which the sheath concentrically surrounds the core), the elastic composition can be in either the sheath or the core. Different elastic compositions of the present invention can also be used independently as the sheath and the core in the same fiber, preferably where both components are elastic and especially where the sheath component has a lower melting point than the core component. Other types of bicomponent fibers are within the scope of the invention as well, and include such structures as side-by-side conjugated fibers (for example, fibers having separate regions of polymers, wherein the elastic composition of the present

invention comprises at least a portion of the fiber's surface).

The shape of the fiber is not limited. For example, typical fiber has a circular cross-sectional shape, but sometimes fibers have different shapes, such as a trilobal shape, or a flat (that is, "ribbon" like) shape. The elastic fiber disclosed herein is not limited by the shape of the fiber.

The novel elastic fiber of the present invention can be used with other fibers such as PET, Nylon, and cotton to make elastic fabrics.

Fiber diameter can be measured and reported in a variety of fashions. Generally, fiber diameter is measured in denier per filament. Denier is a textile term which is defined as the grams of the fiber per 9000 meters of that fiber's length. Monofilament generally refers to an extruded strand having a denier per filament greater than 15, usually greater than 30. Fine denier fiber generally refers to fiber having a denier of 15 or less. Microdenier (aka microfiber) generally refers to fiber having a diameter not greater than 100 micrometers. For the inventive elastic fibers disclosed herein, the diameter can be widely varied, with little impact upon the fiber's elasticity. But the fiber denier can be adjusted to suit the capabilities of the finished article and as such, would preferably be: from 0.5 to 30 denier/filament for melt blown; from 1 to 30 denier/filament for spunbond; and from 1 to 20,000 denier/filament for continuous wound filament.

Nonetheless, preferably, the nominal denier is greater than 37, more preferably greater than or equal to 55 and most preferably greater than or equal to 65. These preferences are due to the fact that typically durable apparel employ fibers with deniers greater than or equal to 40.

Fabrics made from the inventive elastic fibers disclosed herein include both woven and nonwoven fabrics. Nonwoven fabrics can be made variously, including spunlaced (or hydrodynamically entangled) fabrics as disclosed in USP 3,485,706 (Evans) and USP 4,939,016 (Radwanski et al.); by carding and thermally bonding staple fibers; by spunbonding continuous fibers in one continuous operation; or by melt blowing fibers into fabric and subsequently calendering or thermally bonding the resultant web. These various nonwoven fabric manufacturing techniques are well known to those skilled in the art and the disclosure is not limited to any particular method. Other structures made from such fibers are also included within the scope of the invention, including for example, blends of these novel fibers with other fibers (for example, poly(ethylene terephthalate) (PET) or cotton).

Fabricated articles which can be made using the inventive elastic fibers and fabrics disclosed herein include elastic composite articles (for example, diapers) that have elastic portions. For example, elastic portions are typically constructed into diaper waist band portions to prevent the diaper from falling and leg band portions to prevent leakage (as shown in USP 4,381,781 (Sciaraffa)). Often, the elastic portions promote better form fitting and/or fastening systems for a good combination of comfort and reliability. The inventive elastic fibers and fabrics disclosed herein can also produce structures which combine elasticity with breathability. For example, the inventive elastic fibers, fabrics or films or all of these of the present invention may be incorporated into the structures disclosed in U.S. provisional patent application 60/083,784, filed May 1, 1998 in name Maugans et al.

The inventive elastic fibers and fabrics disclosed herein can also be used in various structures as described in USP 2,957,512 (Wade). For example, layer 50 of the structure described in USP '512 (that is, the elastic component) can be replaced with the inventive elastic fibers and fabrics.

especially where flat, pleated, creped, or crimped nonelastic materials are made into elastic structures. Attachment of the inventive elastic fibers or fabric disclosed herein to nonelastic fibers, fabrics or other structures can be done by melt bonding or with adhesives. Gathered or shirred elastic structures can be produced from the inventive elastic fibers or fabrics disclosed herein and nonelastic components by pleating the non-elastic component (as described in USP '512) prior to attachment, pre-stretching the elastic component prior to attachment, or heat shrinking the elastic component after attachment.

The inventive elastic fibers described herein also can be used in a spunlaced (or hydrodynamically entangled) process to make novel structures. For example, USP 4,801,482 (Goggans) discloses an elastic sheet (12) which can now be made with the novel elastic fibers/fabric described herein.

Continuous elastic filaments as described herein could also be used in woven applications where high resilience is desired.

The inventive elastic fibers and fabrics disclosed herein with adjustments in molecular weight or degree of crosslinking or extent or radiation or all of these also have adjustable tenacity and retractive force. Such capabilities and characteristics enable extensive design flexibility, for example, to provide for variable retractive forces in the same garment, if needed, as described for example in U.S. Patent No. 5,196,000 (Clear et al.).

U.S. Patent No. 5,037,416 (Allen et al.) describes the advantages of a form fitting top sheet by using elastic ribbons (see member 19 of USP '416). The inventive elastic fibers could serve the function of member 19 of USP '416, or could be used in fabric form to provide the desired elasticity.

Composites that utilize very high molecular weight linear polyethylene or copolymer polyethylene also benefit from the inventive elastic fibers disclosed herein. For

example, a blend of inventive elastic fibers disclosed herein with a very high molecular weight polyethylene fibers (for example, Spectra™ fibers made by Allied Chemical) as described in U.S. Patent No. 4,584,347 (Harpell et al.) may provide bonding through the fibers without melting the high molecular weight fibers, thus preserving the high strength and integrity of the high molecular weight fiber.

As described in U.S. Patent No. 4,981,747 (Morman), the inventive elastic fibers or fabrics disclosed herein can be substituted for elastic sheet 122, which forms a composite elastic material including a reversibly necked material.

The inventive elastic fibers disclosed herein can also be a melt blown elastic component, as described in reference 6 of the drawings of U.S. Patent No. 4,879,170 (Radwanski). U.S. Patent No. '170 generally describes elastic co-form material and manufacturing processes.

Elastic panels can also be made from the inventive elastic fibers and fabrics disclosed herein, and can be used, for example, as members 18, 20, 14, and/or 26 of U.S. Patent No. 4,940,464 (Van Gompel). The inventive elastic fibers and fabrics described herein can also be used as elastic components of composite side panels (for example, layer 86 of USP '464).

The elastic composition can also be shaped or fabricated into elastic films, coatings, sheets, strips, tapes, moldings, profiles, ribbons, bands, foams, fabrics, threads, filaments, plurality of fibers or fibrous web,. The elastic film, coating, molding and sheet of the present invention may be fabricated by any method known in the art, including blown bubble processes (for example, simple bubble as well as biaxial orientation techniques such trapped bubble, double bubble and tenter framing), cast extrusion, injection molding processes, thermoforming processes, extrusion coating processes, profile extrusion, and sheet extrusion processes. Simple blown bubble film processes are described, for example, in The Encyclopedia of Chemical Technology, Fifth

Othmer, Third Edition, John Wiley & Sons, New York, 1981, Vol. 16, pp. 416-417 and Vol. 18, pp. 191-192. The cast extrusion method is described, for example, in Modern

5 Number 11, pages 256 to 257. Injection molding, thermoforming, extrusion coating, profile extrusion, and sheet extrusion processes are described, for example, in Plastics Materials and Processes, Seymour S. Schwartz and Sidney H. Goodman, Van Nostrand Reinhold Company, New York,  
10 1982, pp. 527-563, pp. 632-647, and pp. 596-602.

The elastic strips, tapes and ribbons of the present invention can be prepared by any known method, including the direct extrusion processing or by post-extrusion slitting, cutting or stamping techniques. Profile extrusion is an  
15 example of a primary extrusion process that is particularly suited to the preparation of tapes, bands, and ribbons.

The elastic film, coating or sheet of the present invention can also be rendered pervious or "breathable" by any method well known in the art including by aperturing,  
20 slitting, microperforating, mixing with fibers or foams, incorporating fillers and stretching or combinations thereof. Examples of such methods include, U.S. Patent No. 3,156,242 by Crowe, Jr., U.S. Patent No. 3,881,489 by Hartwell, U.S. Patent No. 3,989,867 by Sisson and U.S. Patent No. 5,085,654  
25 by Buell.

Fabricated articles which can be made using the inventive elastic articles disclosed herein include composite fabric articles (for example, disposable incontinence garments, training pants and diapers, especially pull-up  
30 diapers) that are comprised of one or more elastic component or portion. Inventive examples are such uses may follow the teachings of Kieffer et al. in US Patent No. 4,789,699. The inventive elastic articles disclosed herein can also produce fabric composite structures which combine elasticity with  
35 breathability by utilizing a technique that renders the elastic material pervious or "breathable" such as suggested

by Lippert et al. in U.S. Patent No. 4,861,652 and indicated above.

The inventive elastic articles disclosed herein can also be used in various structures as described in U.S. Patent No. 2,957,512 (Wade). For example, layer 50 of the structure described in USP '512 (that is, the elastic component) can be replaced with the novel elastic materials, especially where flat, pleated, crimped or creped nonelastic materials are made into elastic or semi-elastic structures. Attachment of the novel elastic materials to nonelastic or less-elastic materials can be done with heat bonding or with adhesives. Gathered or shirred elastic composite materials can be produced from the new elastic material described herein and nonelastic components by pleating the non-elastic component (as described in USP '512) prior to attachment, prestretching the elastic component prior to attachment, or heat shrinking the elastic component after attachment.

The recovery after heat shrinking can be further enhanced by effectuating a high degree of orientation into the inventive elastic articles during fabrication. Significant orientation can be accomplished by the utilization of various known techniques such as high blow-up blown film fabrication, tenter framing of cast films and "double bubble" or "trapped bubble" blown film fabrication.

The inventive elastic articles described herein can also be used make other novel structures. For example, U.S. Patent No. 4,801,482 (Goggans) discloses an elastic sheet (12) which can now be made with the inventive elastic articles described herein.

The inventive elastic articles described herein can also be used to make breathable portion or breathable elastic composite materials. For example, U.S. Patent No. 5,085,654 (Buell) discloses a leg band (15) with a breathable portion 45, a breathable topsheet (26), a breathable backsheet (25), elastic elements (31 and 64), a breathable element (54), and a breathable sub-element (96) all or any combination of which



can now be made with the inventive elastic articles disclosed herein in either pervious or impervious forms.

U.S. Patent No. 5,037,416 (Allen et al.) describes the advantages of a form fitting top sheet by using elastic ribbons (member 12) and an elastic backsheet (member 16). Pervious inventive elastic articles described herein could serve the function of member 12 and impervious elastics materials of this invention could function as member 16, or disclosed elastic materials could be used in an elastic composite fabric form.

In U.S. Patent No. 4,981,747 (Morman), the inventive elastic articles disclosed herein can be substituted for elastic sheets 12, 122 and 232 to construct an elastic composite material which includes a reversibly necked material.

Elastic panels, elements, portions or members can also be made from the inventive elastic articles disclosed herein, and can be used, for example, as members 18, 20, 24, and/or 26 of U.S. Patent No. 4,940,464 (Van Gompel). The inventive elastic articles described herein can also be used, for example, as elastic composite side panels (for example, layer) or as elastic ribbons 42 and/or 44..

The following examples are provided to further illustrate and illuminate the present invention but are not intended to limit the invention to the specific embodiments set forth.

#### EXAMPLES

In an investigation to determine the spinnability of various block polymers, several different block polymers were substantially hydrogenated. These block polymers were all triblocks with two vinyl aromatic monomer unit blocks and one conjugated diene monomer unit block and were characterized as having varying molecular parameters.

Also included in this investigation was KRATON G 1652 (comparative run 2), a SBS triblock supplied by Shell.

Chemical Company. The KRATON product is supplied partially hydrogenated. That is, only its conjugated diene monomer unit block is saturated and its vinyl aromatic monomer unit blocks (two polystyrene blocks) remains unchanged. In this investigation, an Instron Capillary Rheometer was used for extrudate strand feed to a variable speed take-up roll. The rheometer die had a diameter of 1,000 microns and a  $L/D$  of 20. The melt temperature was set at 250-255°C and the output rate was maintained at 0.43 gm/min., unless melt fracture occurred at which time, the melt temperature was increased to 260°C and output was reduced to 0.14 gm/min. The objective of this investigation was to determine lowest possible denier attainable for each block polymer and collect sample fibers for additional testing. Table 1 provides the molecular parameters, low shear parallel plate viscosity and fiber spinning results for the various block polymers.

Table I

Ex.	M <sub>p</sub>	M <sub>w</sub>	ηPS	η <sub>1,2</sub> Addition	PS Block M <sub>w</sub>	† Conjugated Diene Unit Saturation Level	† Vinyl Aromatic Unit Saturation Level	Parallel Plate Viscosity at 0.1 rad/s, 190°C (poises)	Mini- mum Denier
Inv Ex 1	62,550	62,820	30	46	10,360	100	>95	1.10E5	-20
Comp 2	ND	50,000	30	ND	ND	100	<90	1.63E6	None
Inv Ex 3	67,870	67,411	35.8	39.3	12,066	100	>95	4.48E5	-70
Inv Ex 4	81,310	80,940	32.2	39.6	13,030	100	>95	1.03E6	-200*
Comp 5	81,620	81,247	37.0	39	15,030	100	>95	8.72 E5	None**
Inv Ex 6	64,315	64,254	32.0	41.3	10,280	100	>95	1.92E5	-20
Comp 7	105,895	105,770	31.0	45	16,390	100	>95	4.16E6	None

ND = not determined.

fiber denier conversion: 20-25 denier = 60 microns diameter.

ηPS and PS Block MW are determined before the hydrogenation step.

\*Output rate was adjusted to 0.14 gm/min. and melt temperature was adjusted to 260°C to offset melt fracture.

\*\*It appeared the suitable fiber could be fabricated at a higher melt temperature (for example, 260°C) although such was not attempted in this investigation.

Inventive Example 1 gave excellent fiber spinning results exhibiting a minimum denier of 20. Conversely, comparative run 2 gave poor results. At 0.3 inch/min. (7.6 mm/min.) of plunger speed (0.43 g/min output rate), comparative run 2 exhibited melt fracture. At 0.1 inch/min. (2.5 mm/min.) Instron plunger speed, the strand coming out of die was clear and did not have visible melt fracture. Nevertheless, all attempts to start the spinline, even at very low take-up speed, were unsuccessful due to fiber breaks. In fact, fibers could not be even pulled slowly onto the take-up device without breaking the spinline. Thus, it was concluded that fibers of less than 250 microns could not be made from comparative run 2 using the above-described fiber spinline.

The high molecular weight examples, comparative runs 5 and 7 could not be spun at all at 250-255°C and a 0.43 gm/min output rate. In fact, comparative run 7 exhibited severe melt fracture at 0.43 gm/min, 0.14 gm/min and even at a 0.04 gm/min output rate. The melt-fractured strand coming out of the die broke immediately upon pulling by hand. Note that in contrast, Inventive Example 1 (62,820  $M_w$  and 30 wt. % polystyrene) was spun to a minimum of 20-25 denier fiber under similar conditions (at 0.43 gm/min output rate).

For fabricating fine denier fibers at melt temperatures less than 260°C using neat block polymer compositions, Table 1 indicates that the total molecular weight limit is less than or equal to 81,500 and the molecular weight limit for the vinyl aromatic monomer unit block for a triblock is less than or equal to 15,000. Nonetheless, it is thought that blending wax, polyolefins, plasticizer, tackifier, processing aid or oil into high molecular weight substantially hydrogenated block polymers would impart fiber spinnability or melt drawability. That is, it is believed formulated compositions would should good spinnability and/or melt drawability.

In another investigation, the low shear rheology of Inventive Example 1 and comparative run 2 were measured using a Rheometrics RMS-800 unit. The data from this investigation are shown in FIG. 1. Surprisingly, Inventive Example 1 exhibited dramatically lower low shear viscosity than comparative run 2 even though Inventive Example 1 had a substantially higher molecular weight. The dramatically lower low shear viscosity of Inventive Example 1 is believed to explain its excellent spinnability.

In a third investigation, the elastic properties of Inventive Example 1 at 117 denier were compared with a 140 denier spandex fiber (comparative run 8) supplied by DuPont Chemical Company under the tradename Lycra\*. The investigation consisted of measuring the percent permanent set after a five-cycles at various levels of strain. To determine the percent permanent set, samples of 2 inch (5.1 cm) gauge length of Inventive Example 1 and comparative run 8 were tested using an Instron tensiometer. A crosshead speed of 10 inches/minute (25 cm/min.) was used to provide a strain rate of  $5 \text{ min}^{-1}$ . Each sample was stretched to a predefined strain (that is, stretched five elongations from 100% to 500% strain at 100% increments using a new samples for each increment) level and then unloaded by reversing the crosshead movement without any hold time in between the stretching and unloading. After five repeats of the same cycle (with no hold time in between the stretching and the unloading), each sample was loaded for a sixth time. The strain at which the load rises above zero was recorded as set strain. The set strain was then plotted as a function of applied strain to provide FIG. 2. FIG. 2 shows that Inventive Example 1 exhibited excellent elastic recovery (low permanent set) after five

deformation cycles, especially at higher elongations (strains).

In a fourth investigation, the stick temperatures of Inventive Example 1 and comparative run 2 were determined. Stick temperature was determined by the following method. Two plaques with the dimension of 1 inch. x 2 inch x 1/16 inch (2.5 cm x 5.1 cm x 0.16 cm) of the polymer were placed in an oven at different temperatures for 15 min. The stick temperature was recorded as the temperature that the two plaques stuck to each other. The stick temperatures of Inventive Example 1 and comparative run were 120°C and 105°C, respectively. Applications where high stick temperatures are an advantage includes elastic fiber used in fabrics subject to high drying temperature, parts of automotive interior, and gaskets.

In a fifth investigation, the maximum service temperature of Inventive Example 1 and comparative run 2 were determined. Maximum service temperatures were conveniently determined using a thermal mechanical analyzer (Perkin-Elmer TMA 7 series). Samples of each block polymer were scanned at 5°C/minute with the load set at 1 Newton. The point at which the TMA probe penetrated 1 mm into the sample was taken as the maximum service temperature for the sample. The TMA probe penetration data from the investigation is shown in FIG. 3. The data show that Inventive Example 1 exhibited higher heat resistance (that is, had a higher maximum service temperature) than comparative run 2.

In another evaluation, the effect of formulating block polymers with oil was investigated. In this evaluation, white mineral oil (Witco 200 process oil supplied by Witco Chemical Corporation) was separately melt compounded with comparative block polymer 2 and with a substantially hydrogenated triblock polymer (Inventive Example 9) characterized as having a  $M_f$  of 65,900 and comprising 32

weight percent polystyrene before hydrogenated and which was hydrogenated 100 percent with respect to its conjugated diene unit (butadiene) and >99 weight percent with respect to its vinyl aromatic units (styrene). The oil was added at 12, 24  
5 and 36 weight percent into both block polymers and the resulting formulated systems as well as the neat block polymers themselves were all tested for various performance properties, including ultimate tensile strength, melt flow rate at 200°C using a 5-kg weight, percent set and percent  
10 stress relaxation.

The tensile properties (ultimate tensile strength and percent elongation) were determined in accordance with ASTM D-638. The melt flow rates were determined in accordance with ASTM D-1238, Condition 200°C/5kg. The Shore A values  
15 were determined in accordance with ASTM D-2240. Modulus was determined in accordance with ASTM D-790. Percent haze values were determined in accordance with ASTM D-1003. The percent stress relaxation and set data were determined using an Instron 1123 tensiometer. In this determination (which is  
20 based on ASTM D 4649-87, Appendix A13), samples were stretched to 200% elongation at a crosshead speed of 1 in/min and held there for 30 seconds for the stress relaxation measurement. The crosshead was then returned (unloaded) at 10 in./min. and after 60 seconds the set was measured. Data  
25 were collected for one and two complete cycles.

Table 2 shows the designations of the various formulated systems and the results of the performance testing. FIG. 4, which is a plot of the interrelationship between the melt flow rate and  
30 ultimate tensile strength for the various examples, shows surprisingly results for the inventive composition (Inventive Example 9) and the inventive formulated systems (Inventive Examples 10-12). The inventive composition and inventive formulated systems show  
35 excellent strength to processability performance.

In another evaluation, the effect of blending a substantially hydrogenated block polymer and a partially hydrogenated block polymer into an ethylene polymer was investigated. Table 3 lists the various the blends investigated in this evaluation and includes the block polymer weight percentages and example designations. The ethylene polymer was a substantially linear ethylene interpolymer supplied by Dupont-Dow Elastomers under the designation ENGAGE™ EG8200. Lycra was also included in this evaluation as a control material. The various blends and control samples were tested for percent elongation and percent set strain at five cycles as described above, except the range was from 100% to 400% strain instead of from 100% to 500%. In this evaluation, except for Lycra which was tested at 140 denier, 70 denier fiber was used for the testing. The 70 denier fiber for each sample was made using a capillary rheometer as described above. Notably, fiber cannot be spun at 40 wt. % Kraton G1652.

FIG. 5-7 show the results of this blend evaluation. Additive weight percent calculations from the results in these figures indicate that at 200%-300% strain, ethylene polymer blends containing greater than or equal to 40 weight percent substantially hydrogenated block polymer exhibited surprisingly better elasticity than is predictable from additive weight percent calculations. Also, the improvement in elasticity at greater than or equal to 40 weight percent was substantially better than was predictable from results at lower blend levels or from results at equivalent blend levels with partially hydrogenated block polymers.



Table 2

Example	Block Polymer	Weight Percent Oil	MFR (g/10 min)	Shore A	Ultimate Tensile (kg/cm <sup>2</sup> )	300% Modulus (psi)	Percent Elongation	1 Cycle % stress relax	2 Cycle % stress relax
Inv. Ex 9	Inv. Ex 9	0	4.5	81.5	5,979(420)	1,194(84)	450		
Inv. Ex 10	Inv. Ex 9	12	26.3	57.0	5154(362)	646(45)	583	6	8.5
Inv. Ex 11	Inv. Ex 9	24	124.2	54.0	3674(258)	395(28)	700	7.8	10.6
Inv. Ex 12	Inv. Ex 9	36	512.2	52.5	474(33)	227(16)	881	15.2	22.5
Comp Run 2	Comp Run 2	0	0.9	78.8	5,651(397)	1,003(71)	481		
Comp Run 13	Comp Run 2	12	5.3	59.5	4608(324)	704(50)	606	8.1	8.8
Comp Run 14	Comp Run 2	24	30.6	56.5	2465(173)	459(32)	694	6.3	7.4
Comp Run 15	Comp Run 2	36	157.4	52.6	1307(92)	355(25)	706	6.9	9.2

Table 3

Example	Weight Percent SHBP	Weight Percent EG8200	Weight Percent PHBP
Inv. Ex 9	100	0	0
Inv. Ex 16	60	40	0
Inv. Ex 17	40	60	0
Ex 18	20	80	0
Comp Run 20	0	100	0
Comp Run 21*	0	0	0
Comp Run 22'	0	80	20
Comp Run 23**	0	80	20
Comp Run 24'	0	60	40

\*comparative run 21 is Lycra and the same as comparative run 8  
 SHBP = substantially hydrogenated block polymer (that is, Inventive Example 9).  
 PHBP = partially hydrogenated block polymer.  
 'The partially hydrogenated block polymer was Kraton G1657 supplied by Shell Chemical Company.  
 \*\*The partially hydrogenated block polymer was Kraton G1652 supplied by Shell Chemical Company.

**We Claim:**

1. An elastic article comprising at least one hydrogenated block polymer and, optionally, at least one other polymer selected from the group consisting of a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic interpolymer, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin interpolymer, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin/conjugated diene interpolymer, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic polyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymer, and an elastomeric metallocene-catalyzed synthetic polymer or a blend or formulated system thereof,

wherein the hydrogenated block polymer is a substantially hydrogenated block polymer characterized as having:

- i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;
- ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (b) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and
- iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

2. The elastic article of Claim 1, wherein the article is a component of a composite item having a nonwoven portion.

3. The elastic article of Claim 2, wherein the item comprises leg gathers, legbands, sidepanels or a waistband.

4. The elastic article of Claim 3, wherein the leg gathers or legbands, sidepanels or waistband comprises the elastic article.

10

5. The elastic article of Claim 1, wherein the article is in the form of a film, sheet, coating, band, strip, profile, molding, foam, tape, fabric, thread, filament, ribbon, fiber, plurality of fibers or, fibrous web.

15

6. The elastic article of Claim 5, wherein the strip or ribbon is a nonwoven strip or ribbon.

7. The elastic article of Claim 5, wherein the fibers are monofilament, bicomponent or multicomponent fibers.

20

8. The elastic article of Claim 5, wherein the fibers are surface treated or crosslinked.

9. The elastic article of Claim 8, wherein the surface treatment or crosslinking includes x-ray irradiation, electron beam irradiation, silane curing, sulfonation, fluorination or corona discharge.

25

10. The elastic article of Claim 1, wherein the article is bondable.

30

11. The elastic article of Claim 10, wherein the bondable article is a plurality of fibers.

35

12. The elastic article of Claim 11, wherein the fibers are bondable by heat, ultrasound, radio frequency, or combination thereof.

5        13. The elastic article of Claim 11, wherein the fibers are bondable using a hot melt adhesive.

10        14. The elastic article of Claim 13, wherein bondability is improved such that a hot melt adhesive amount of at least 10 percent less provides equivalent or higher Instron-measured bond strength relative to a comparative spandex fiber.

15        15. The elastic article of Claim 1 in the form of a core/sheath structure.

20        16. The elastic article of Claim 15, wherein the sheath material has a higher softening and melting point than the core material.

      17. The elastic article of Claim 15, wherein the sheath material has a lower softening and melting point than the core material.

25        18. The elastic article of Claim 17, wherein the structure is thermal bondable without hot melt adhesive.

30        19. The elastic article of Claim 17, wherein the structure is thermal bondable at a reduced amount of hot melt adhesive relative to a comparative structure comprising spandex as the sheath material.

      20. The elastic article of Claim 15, wherein the core/sheath structure is a fiber or plurality of fibers.

35

      21. A composite structure comprising the elastic article of Claim 1.

22. An absorbent item comprising the elastic article of Claim 1.

5        23. The absorbent item of Claim 22, wherein the item comprises at least one acquisition distribution layer, binder material or plurality of binder fibers, absorbent core material, or topsheet/backsheet.

10       24. The absorbent item of Claim 23, wherein the item comprises at least one acquisition distribution layer.

15       25. The absorbent item of Claim 24, wherein the acquisition distribution layer comprises a foam material or nonwoven material.

20       26. The absorbent item of Claim 24, wherein the acquisition distribution layer comprises a foam material and a nonwoven material.

27. The absorbent item of any of Claims 25 and 26, wherein the foam material is a gas-blown foam or a dispersion (latex) foam.

25       28. The absorbent item of Claim 27, wherein the foam material comprises a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic  
interpolymer, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin  
interpolymer, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin/conjugated diene  
30       interpolymer, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic polyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl  
functionalized polyether (or polyetheramine), a  
35       styrene/conjugated diene interpolymer, and an elastomeric metallocene-catalyzed synthetic polymer or a blend of any combination thereof.

29. The absorbent item of Claim 24, wherein the at least one acquisition distribution layer comprises the elastic article.

5        30. The absorbent item of Claim 27, wherein the foam material comprises the elastic material.

31. The absorbent item of Claim 28, wherein the foam material further includes another synthetic polymer.

10

32. The absorbent item of Claim 27, wherein the foam material includes at least one additive.

15        33. The absorbent item of Claim 32, wherein the additive is a plurality of fibers, pigment or filler.

34. The absorbent item of any of Claims 25 and 26, wherein the nonwoven material is spunbonded or meltblown.

20        35. The absorbent item of Claim 34, wherein the spunbonded nowoven is not calendered to maintain loftiness.

25        36. The absorbent item of Claim 34, wherein the spunbonded or melt-blown nonwoven has processed to provide enhanced loftiness (relative to the loftiness inherent to spunbonding or melt blowing).

30        37. The absorbent item of Claim 34, wherein the nonwoven material comprises a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic interpolymer, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub> α-olefin interpolymer, an C<sub>3</sub>-C<sub>20</sub> α-olefin/conjugated diene interpolymer, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic  
35        polyurethane, an elastic polyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymer, and an elastomeric

metallocene-catalyzed synthetic polymer or a blend of any combination thereof.

5 38. The absorbent item of Claim 34, wherein the nonwoven material comprises the elastic material.

39. The absorbent item of Claim 34, wherein the nonwoven material comprises carded, air laid, or wet laid structures from staple fibers.

10

40. The absorbent item of Claim 34, wherein the nonwoven material comprises curly, self crimping, bicomponent, multicomponent, tip trilobal, bonded, multiconstituent, microfiber, capillary or hollow fibers.

15

41. The absorbent item of Claim 34, wherein the nonwoven material comprises surface treated fibers.

20 42. The absorbent item of Claim 34, wherein the surface treatment includes plasma, corona, sulfonation or azide treatment

25 43. The absorbent item of Claim 34, wherein the nonwoven material is characterized as having improved resiliency, comfort or form fitting properties.

44. The absorbent item of Claim 23, wherein the item comprises at least one binder material.

30 45. The absorbent item of Claim 44, wherein the binder material is in the absorbent core, acquisition distribution layer, topsheet, or backsheet of the absorbent item.

35 46. The absorbent item of Claim 44, wherein the binder material is multicomponent, bicomponent, monocomponent or multiconstituent

47. The absorbent item of Claim 44, wherein the binder material consists of binder fibers.

48. The absorbent item of Claim 46, wherein the multi- or bicomponent binder structure comprise core/sheath, pie, side by side, or islands in the sea configurations.

49. The absorbent item of Claim 48, wherein the core comprises a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic interpolymers, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin interpolymers, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin/conjugated diene interpolymers, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic polyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymers, and an elastomeric metallocene-catalyzed synthetic polymer or crosslinked versions of these and combinations thereof.

50. The absorbent item of Claim 49, wherein the core comprises the elastic material.

51. The absorbent item of Claim 48, wherein the sheath comprises a thermoplastic epoxy, polyacrylate, polyethylene, ethylene/vinyl aromatic interpolymers, polyethylene/maleic anhydride graft, ethylene acrylic acid interpolymers, styrene acrylates, polyurethane, maleated polymers (eg: maleated polypropylene).

52. A binder material suitable for use as a powder and in a dispersion, solution or latex comprising the elastic material of Claim 1.

53. The absorbent item of Claim 23, wherein the absorbent core material is a foam, nonwoven or foam/fiber composite.

54. The absorbent item of Claim 53, wherein the absorbent core material does not comprise an inherently absorbent polymer.

55. The absorbent item of Claim 53, wherein the absorbent core material is a foam material.

56. The absorbent item of Claim 55, wherein the absorbent core foam material comprises a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic interpolymers, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin interpolymers, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -



olefin/conjugated diene interpolymers, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic polyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymers, and an elastomeric metallocene-catalyzed synthetic polymer or a blend of any combination thereof.

57. The absorbent item of Claim 55, wherein the absorbent core foam material comprises the elastic material.

58. The absorbent item of Claim 55, wherein the absorbent core foam material is characterized as having a uniform or gradient cell structure.

59. The absorbent item of Claim 53, wherein the absorbent core material is a nonwoven material.

60. The absorbent item of Claim 59, wherein the absorbent core nonwoven material comprises a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic interpolymers, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin interpolymers, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin/conjugated diene interpolymers, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic polyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymers, and an elastomeric metallocene-catalyzed synthetic polymer or a blend of any combination thereof.

61. The absorbent item of Claim 59, wherein the absorbent core nonwoven material comprises the hydrogenated block polymer.

62. The absorbent item of Claim 53, wherein the absorbent core nonwoven material is air laid, melt blown, or spun bonded.

63. The absorbent item of Claim 53, wherein the absorbent core material comprises a melt blown/SAP composite foam structure.

5        64. The absorbent item of Claim 59, wherein the absorbent core nonwoven material includes surface treated fibers.

10       65. The absorbent item of Claim 62, wherein the surface treatment comprises sulfonation, plasma, x-ray irradiation, electron beam irradiation, silane curing, or corona discharge treatment.

15       66. The absorbent item of Claim 59, wherein the absorbent core nonwoven material comprises absorbent fibers.

      67. The absorbent item of Claim 66, wherein the absorbent fibers comprise sulfonated or hydrophilic polymers.

20       68. The absorbent item of Claim 59, wherein the absorbent core nonwoven material is made using an air laying technique.

25       69. The absorbent item of Claim 23, wherein the absorbent core material comprises multiple layers.

      70. The absorbent item of Claim 69, wherein the multiple layers comprise different polymer compositions.

30       71. The absorbent item of Claim 70, wherein the each multilayer is provided using a different fabrication methods.

35       72. The absorbent item of Claim 69, wherein at least one of the multiple layers comprise another elastic material.

      73. The absorbent item of Claim 69, wherein at least one of the multiple layers comprise the elastic material.

40       74. The absorbent item of Claim 23, wherein the absorbent core material comprises pockets of absorbent polymer to provide localized patterned absorption.

45       75. The absorbent item of Claim 23, wherein the absorbent core material is designed to consolidate the acquisition distribution layer or layers and the backsheet.

50       76. The absorbent item of Claim 23, wherein the absorbent core material has a fluid activation characteristic.

      77. The absorbent item of Claim 76, wherein the absorbent core material is urine activated.

78. The absorbent item of Claim 76, wherein the fluid activation is accomplished using a shape-reshape polymer.

5 79. The absorbent item of Claim 78, wherein the shape-reshape polymer is an ethylene/styrene interpolymer.

10 80. The absorbent item of Claim 23, wherein the absorbent core material is provided as rolled goods.

81. The absorbent item of Claim 23, wherein the absorbent core material is conformable, moldable to the body of the wearer.

15 82. The absorbent item of Claim 79, wherein the absorbent core material comprises a shape-reshape polymer to provide conformability and moldability.

20 83. The absorbent item of Claim 82, wherein the shape-reshape polymer is an ethylene/styrene interpolymer.

25 84. The absorbent item of Claim 23, wherein the absorbent core material is directly melt-blown or spunbonded on top of the backsheet.

85. The absorbent item of Claim 23, wherein the absorbent core material is thin until wet and at ambient temperature.

30 86. The absorbent item of Claim 85, wherein the absorbent core material expands when subjected to moisture.

35 87. The absorbent item of Claim 85, wherein the absorbent core material expands when subjected to temperature greater than or equal to 97°C.

40 88. The absorbent item of Claim 85, wherein the absorbent core material comprises an ethylene/styrene interpolymer as a binder material.

89. The absorbent item of Claim 23, wherein the absorbent core material comprises multilobal shaped fibers to provide wicking.

45 90. The absorbent item of Claim 89, wherein the wicking is vertical with respect to the horizon.

50 91. The absorbent item of Claim 23, wherein the absorbent core material comprises at least one thermally bondable component to tailor distribution of core components.

92. The absorbent item of Claim 23, wherein the topsheet or backsheet is spunbonded or meltblown.

93. The absorbent item of Claim 92, wherein the topsheet or backsheet comprise the elastic material.

94. The absorbent item of Claim 92, wherein the topsheet or backsheet comprises a reactive tailored liquid polyurethane, an elastomeric or sulfonated ethylene/vinyl aromatic interpolymer, an elastomeric ethylene/C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin interpolymer, an C<sub>3</sub>-C<sub>20</sub>  $\alpha$ -olefin/conjugated diene interpolymer, an elastic polypropylene polymer, an enhanced polypropylene polymer, an elastomeric thermoplastic polyurethane, an elastic polyester, a partially hydrogenated block polymer, an elastic polyamide, a hydroxyl functionalized polyether (or polyetheramine), a styrene/conjugated diene interpolymer, and an elastomeric metallocene-catalyzed synthetic polymer, crosslinked versions of these and combinations thereof.

95. The absorbent item of Claim 92, wherein the topsheet or backsheet comprises elastic nonwoven microfibers to provide stretchability while maintaining microporous structure.

96. The absorbent item of Claim 92, wherein the topsheet or backsheet comprise fluorinated surfaces to provide breathability while holding a fluid.

97. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises carded structures.

98. The absorbent item of Claim 97, wherein the carded structures comprise at least one ethylene/styrene interpolymer.

99. The absorbent item of Claim 98, wherein the at least one ethylene/styrene interpolymer has the characteristic of being hard carded and soft when subjected to the body temperatures.

100. The absorbent item of Claim 23, wherein the topsheet or backsheet is provided using an air laid or wet laid fabrication technique.

101. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises a coating to provide a low coefficients of friction.

102. The absorbent item of Claim 101, wherein the topsheet-to-topsheet or backsheet-to-backsheet COF is less than or equal to 3.0.

5        103. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises a fuzzy film characteristic.

10       104. The absorbent item of Claim 103, wherein the fuzzy film is characteristic is accomplished by mechanical working and pricking of a film.

105. The absorbent item of Claim 103, wherein the film is a coextruded film.

15       106. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises a nonwoven material.

20       107. The absorbent item of Claim 106, wherein the nonwoven material is post crosslinked.

20       108. The absorbent item of Claim 107, wherein the post-crosslinking is accomplished using electron beam irradiation under a nitrogen atmosphere.

25       109. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises elastic and inelastic fibers.

30       110. The absorbent item of Claim 23, wherein the topsheet or backsheet is semi-permeable.

111. The absorbent item of Claim 110, wherein the semi-permeability is with respect to one side or direction.

35       112. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises a calendered elastic foam which provides waterproofability and breathability.

40       113. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises a foam, film or nonwoven and is integrated with at least one other component of the item.

45       114. The absorbent item of Claim 113, wherein the topsheet is integrated with the acquisition distribution layer.

115. The absorbent item of Claim 113, wherein the backsheet is integrated with the acquisition distribution layer.

50       116. The absorbent item of Claim 23, wherein the topsheet or backsheet is characterized as having shape-reshape properties which provide improved comfort.

117. The absorbent item of Claim 116, wherein the shape-reshape properties are accomplished by the use of an ethylene/styrene interpolymers.

5 118. The absorbent item of Claim 23, wherein the topsheet or backsheet is thermal or ultrasonic bondable.

10 119. The absorbent item of Claim 23, wherein the backsheet comprises moisture-activated indicator.

120. The absorbent item of Claim 119, wherein the indicator is a fluorescent indicator.

15 121. The absorbent item of Claim 23, wherein the topsheet or backsheet consists essentially of an all-foam systems.

20 122. The absorbent item of Claim 121, wherein the foam system is characterized as having open gradient cells.

123. The absorbent item of Claim 23, wherein the topsheet or backsheet comprises a laminated foam systems.

25 124. The absorbent item of Claim 123, wherein the foam is laminated onto the topsheet.

125. The absorbent item of Claim 123, wherein the foam is laminated onto the backsheet.

30 126. The absorbent item of Claim 23, wherein the absorbent item is a single component rolled good.

127. The absorbent item of Claim 23, wherein the absorbent item is a multilayer multicomponent rolled good.

35 128. The absorbent item of Claim 23, wherein the absorbent item is a consolidated rolled good, wherein at least the acquisition distribution layer, the absorbent core material and backsheet are integrated.

40 129. The absorbent item of Claim 23, wherein the absorbent item comprises a dippable shell.

130. The absorbent item of Claim 22, wherein the absorbent item is SAP-free.

131. The absorbent item of Claim 129, wherein the absorbent item further comprises a sprayed core.

5 132. The absorbent item of Claim 22, wherein the absorbent item consists essentially of foamed components.

133. The absorbent item of Claim 132, wherein the absorbent item consists essentially of a single foam having open gradient cells.

10

134. The absorbent item of Claim 22, wherein the absorbent item comprises at least one foam laminate.

15 135. The absorbent item of Claim 22, wherein the absorbent item comprises flushable binder materials.

136. The absorbent item of Claim 23, wherein the absorbent item comprises degradable materials.

20 137. The absorbent item of Claim 136, wherein the binder material is degradable.

138. The absorbent item of Claim 136, wherein the absorbent core material is degradable.

25

139. The absorbent item of Claim 136, wherein degradability is accomplished by the use an ethylene/vinyl alcohol copolymer or a polyvinyl alcohol polymer.

30 140. A nowoven clothing item comprising the elastic article of Claim 1.

141. The clothing item of Claim 140, wherein the elastic article is in the form of a film, sheet, coating, band,

strip, profile, molding, foam, tape, fabric, thread,  
filament, ribbon, fiber, plurality of fibers or, fibrous web.

5       142. The clothing item of Claim 141, wherein the item is  
a leisure, sports, industrial, medical or sanitation apparel  
item.

10       143. The clothing item of Claim 142, wherein the apparel  
item is a surgical gown or cap.

144. The clothing item of Claim 142, wherein the apparel  
item has sleeves and the sleeves comprise the elastic  
article.

15       145. The clothing item of Claim 142, wherein the apparel  
item has cuffs and the cuffs comprise the elastic article.

20       146. The clothing item of Claim 142, wherein the apparel  
item has a waistband and the waistband comprises the elastic  
article.

25       147. The clothing item of Claim 142, wherein the apparel  
item has a neck opening and the neck opening comprises the  
elastic article.

148. The clothing item of Claim 142, wherein the apparel  
item has at least one gathering band and the gathering band  
comprises the elastic article.

30       149. The clothing item of Claim 142, wherein the apparel  
item is a cap or head cover.

35       150. The clothing item of Claim 142, wherein the apparel  
item is shoes, feet coverings or booties



151. A nowoven item comprising the elastic article of Claim 1, wherein the item is a surgical drape, hazardous chemical suit, non-hazardous industrial apparel item, disposable clean room apparel item, geotextile, wipe, towel, fabric or personal care item.

152. A nowoven item of Claim 151, wherein the agricultural nonwoven is a agricultural nonwoven item.

153. A nowoven item of Claim 151, wherein the wipe is a cosmetic wipe.

154. A nowoven item of Claim 151, wherein the wipe is a personal hygiene wipe.

155. A nowoven item of Claim 151, wherein the personal care item is a mit.

156. An apparel accessory item comprising the elastic article of Claim 1.

157. The accessory item of Claim 156, wherein the item is a belt, sock, ribbon, headband, or hat.

158. A woven item comprising the elastic article of Claim 1.

159. A carpet comprising the elastic article of Claim 1.

160. The carpet of Claim 159, wherein the fibers comprise the elastic article.

161. The carpet of Claim 160, wherein the fibers are present as a bulk, continuous filament.

162. The carpet of Claim 159, wherein the carpet backing comprises the elastic article.

163. The carpet of Claim 162, wherein the carpet backing comprises a nonwoven material.

164. The carpet of Claim 162, wherein the carpet backing comprises a woven material.

165. A diaper comprising the elastic article of Claim 1.
166. A incontinence pad comprising the elastic article  
of Claim 1.
167. A sanitary napkin comprising the elastic article of  
Claim 1.
168. The elastic article of Claim 1 in the form of a  
nonwoven-like fibrillated foam.
169. The elastic article of Claim 168, wherein the foam  
is made from a latex or aqueous dispersion.
170. A yarn comprising the elastic material of Claim 1.
171. The yarn of Claim 170, wherein the yarn comprises  
monofilaments.
172. The yarn of Claim 170, wherein the yarn comprises  
covered monofilaments.
173. The yarn of Claim 170, wherein the yarn comprises  
multifilaments.
174. An apparel item comprising the elastic article of  
Claim 1.
175. The apparel item of Claim 174, wherein the item is  
selected from the group consisting of socks, hosiery,  
intimate apparel, bra, panties, activewear, sportswear,  
athletic apparel, sleepwear, skirt, pants, blouse, work  
uniform, overalls, jumpsuit, undershirt, underwear and shirt.
176. A form-fitting packaging item comprising the  
elastic article of Claim 1.
177. The packaging item of Claim 176, wherein the item  
is a produce bag.
178. The packaging item of Claim 176, wherein the item  
is netting.
179. An upholstery or furniture item comprising the  
elastic article of Claim 1.
180. The upholstery or furniture item of Claim 179,  
wherein the item is a cushion, armrest, pillow, automobile  
carpeting, headliner, trunkliners, automobile upholstery,  
mattress ticking, or seat, chair or sofa covering.
181. The apparel item of Claim 175, wherein the athletic  
apparel is an athletic jersey, aerobic shorts, gym shorts,  
athletic pants, or running shorts.

182. A textile item comprising the elastic article of Claim 1.

5       183. The textile item of Claim 182, wherein the item comprises fiber or a plurality fibers and at least one poly lactic acid polymer.

10       184. The textile item of Claim 183, wherein the fiber or fibers comprises the hydrogenated block polymer.

185. The textile item of Claim 184, wherein the fiber further comprises the poly lactic acid polymer.

15       186. A footwear item comprising the elastic article of Claim 1.

20       187. The footwear item of Claim 186, wherein the item is a shoe.

188. The footwear item of Claim 186, wherein the item is a slipper.

25       189. The footwear item of Claim 186, wherein the item is an athletic shoe or sneaker.

190. The footwear item of Claim 186, wherein the item is a sandal.

30       191. The yarn of Claim 170, wherein the yarn is two dimensional or multidimensional.

35       192. The elastic article of Claim 5, wherein fiber thickness is in the range of from 0.05 micron to 50 mils (1.27 mm).

40       193. The elastic article of Claim 192, wherein fiber thickness is in the range of from 0.1 micron to 24 mils (0.61 mm).

194. The elastic article of Claim 192, wherein the article is fishing line having a thickness in range of from 1 mil to 12 mils (0.025 mm to 0.305 mm).

45       195. A wound care item comprising the elastic article of Claim 1.

50       196. The wound care item of Claim 195, wherein the item is gauze.

197. The wound care item of Claim 195, wherein the item is a bandage.

198. The wound care item of Claim 195, wherein the item is a wrap suitable for healing sprains and strains.

5 199. A pad comprising the elastic article of Claim 1.

200. The pad of Claim 199, wherein the pad is a foamed apparel shoulder pad.

10 201. The pad of Claim 199, wherein the pad is a foamed protective athletic pad.

202. The clothing item of Claim 142, wherein the apparel item comprises stabilizers.

15 203. The clothing item of Claim 202, wherein the stabilizers are interfacing and the interfacing comprises the elastic article.

20 204. The elastic article of Claim 1, wherein the substantially hydrogenated block polymer characterized as having:

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

25 ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (b) has a weight average molecular weight,  $M_{w_b}$ ,  
30 of from 12,000 to 110,000; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 95 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 99 percent, as  
35 determined using UV-VIS spectrophotometry and proton NMR analysis.

205. The elastic material of Claim 5, wherein the article is fiber or a plurality of fibers and the substantially hydrogenated block polymer is characterized as having:

5        i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

10        ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (b) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

15        iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 95 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 99 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

20

206. The elastic article of Claim 1 comprising a blend of the at least one substantially hydrogenated block polymer and at least one other polymeric material, wherein the substantially hydrogenated block polymer characterized as  
25 having:

      i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

30        ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene

monomer unit (b) has a weight average molecular weight,  $Mw_b$ , of from 12,000 to 110,000; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 95 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 99 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

207. The elastic article of Claim 5, wherein the article is fiber or a plurality of fibers and comprises a blend of the at least one substantially hydrogenated block polymer and at least one other polymeric material, wherein the substantially hydrogenated block polymer characterized as having:

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $Mw_a$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (b) has a weight average molecular weight,  $Mw_b$ , of from 12,000 to 110,000; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 95 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 99 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

208. A method of making the elastic article of Claim 5, the method comprising providing at least one substantially hydrogenated block polymer characterized as having:

5 i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

10 ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (b) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

15 iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 95 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 99 percent, as determined using UV-VIS spectrophotometry and proton NMR analysis.

20 209. The method of Claim 208 wherein the article is fabricated using a technique selected from the group consisting of fiber melt spinning, fiber melt blowing, film blowing, cast film, injection molding, pultrusion, thermoforming, stamping, forging, blow molding, sheet  
25 extrusion, profile extrusion, solvent casting, solvent coating, thermal lamination, calendering, roll milling, reaction injection molding, extrusion coating, dispersion coating, fiber extrusion and rotomolding.

30 210. The method of Claim 208, wherein the article is permitted to cool or is quenched to ambient temperatures between 0 and 30°C before the application of additional heating or ionizing radiation or both under a nitrogen atmosphere.

211. The elastic article of Claim 206, wherein the at least one other polymeric material is a homogeneously branched ethylene polymer.

212. The elastic article of Claim 211, wherein the homogeneously branched ethylene polymer is a homogeneously branched linear ethylene polymer.

213. The elastic article of Claim 212, wherein the homogeneously branched linear ethylene polymer is characterized as having a single differential scanning calorimetry, DSC, melting peak between  $-30^{\circ}$  and  $150^{\circ}\text{C}$ .

214. The elastic article of Claim 211, wherein the homogeneously branched ethylene polymer is a substantially linear ethylene polymer characterized as having:

(a) melt flow ratio,  $I_{10}/I_2 \geq 5.63$ ,

(b) a molecular weight distribution,  $M_w/M_n$ , as determined by gel permeation chromatography and defined by the equation:

$$(M_w/M_n) \leq (I_{10}/I_2) - 4.63,$$

(c) a gas extrusion rheology such that the critical shear rate at onset of surface melt fracture for the substantially linear ethylene polymer is at least 50 percent greater than the critical shear rate at the onset of surface melt fracture for a linear ethylene polymer, wherein the substantially linear ethylene polymer and the linear ethylene polymer comprise the same comonomer or comonomers, the linear ethylene polymer has an  $I_2$  and  $M_w/M_n$  within ten percent of the substantially linear ethylene polymer and wherein the respective critical shear rates of the substantially linear ethylene polymer and the linear ethylene polymer are measured at the same melt temperature using a gas extrusion rheometer, and

(d) a single differential scanning calorimetry, DSC, melting peak between  $-30^{\circ}$  and  $150^{\circ}\text{C}$ .



215. The method of Claim 208, wherein the article is irradiated with ionizing energy.

216. The method of Claim 215, wherein the ionizing  
5 energy is provided under a nitrogen atmosphere by an electron beam source.

217. The method of Claim 208, wherein the substantially hydrogenated block polymer is blended with at least one other  
10 polymeric material.

218. The method of Claim 217, wherein the polymeric material is an olefin polymer.

15 219. The method of Claim 217, wherein the polymeric material is a polyolefin elastomer or plastomer having a crystallinity at 23°C less than or equal to 45 weight percent, as determined using differential scanning calorimetry.

20 220. The method of Claim 219, wherein the polyolefin has a crystallinity at 23°C less than or equal to 20 weight percent, as determined using differential scanning calorimetry.

25 221. The method of Claim 217, wherein the polymeric material is a polypropylene.

222. The method of Claim 221, wherein the polypropylene  
30 is an amorphous polypropylene polymer.

223. The elastic article of any one of Claim 204 and Claim 206, wherein the substantially hydrogenated block polymer is a triblock having, before hydrogenation, two vinyl aromatic monomer unit blocks and one conjugated diene monomer  
35 unit block.

224. The elastic article of Claim 223, wherein each vinyl aromatic monomer unit block has a weight average molecular weight less than or equal to 15,000.

5        225. The elastic article of Claim 223, wherein at least one of the vinyl aromatic monomer unit blocks comprises styrene.

10       226. The elastic article of Claim 223, wherein both of the vinyl aromatic monomer unit blocks comprise styrene.

227. The elastic article of Claim 223, wherein the conjugated diene monomer unit block is butadiene.

15       228. The elastic material of any one of Claim 204 and Claim 206 in the form of a film.

229. The elastic material of any one of Claim 204 and Claim 206 in the form of a fiber or plurality of fibers.

20       230. The elastic material of any one of Claim 204 and Claim 206 in the form of a molding.

25       231. The elastic article material of any one of Claim 204 and Claim 206 in the form of a thermoform.

232. The elastic material of any one of Claim 204 and Claim 206 in the form of a molding.

30       233. A personal hygiene item comprising the elastic article of any one of Claim 204 and Claim 206.

234. The item of Claim 233 wherein the item is a disposable diaper.

35       235. A diaper comprising a backsheet or a topsheet which is comprised of the elastic article of any one of Claim 204 and Claim 206.

236. An infection control item comprising the elastic article of any one of Claim 204 and Claim 206.

237. A formulated system comprising

5 (A) at least one substantially hydrogenated block polymer characterized as having

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40

10 ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (b) has a weight average molecular weight,  $M_{w_b}$ ,  
15 of from 12,000 to 110,000; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as  
20 determined using UV-VIS spectrophotometry and proton NMR analysis; and

(B) an oil; and optionally,

(C) from 0 to 60 weight percent of polyolefin having a weight average molecular weight greater than 10,000, as  
25 determined using gel permeation chromatography;

(D) from 0 to 40 weight percent of a wax; and

(E) from 0 to 50 weight percent of a tackifier.

238. An elastic film, sheet, coating, band, strip,  
30 profile, molding, foam, tape, fabric, thread, filament, ribbon, fiber, or, fibrous web comprising the formulated system of Claim 237.

239. A formulated system comprising

35 at least one substantially hydrogenated block polymer characterized as having

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40

5 ii) a weight average molecular weight ( $M_w$ ) before hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (a) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (b) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

10 iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as determined using UV-VIS spectrophotometry and proton NMR  
15 analysis;

and at least one low molecular weight viscosity-reducing additives selected from the group consisting of oil, wax, processing aid, plasticizer and tackifier.

20 240. The formulated system of Claim 239, further comprising an ethylene polymer having an  $I_2$  melt index of less than 2000 g/10 minutes at 190°C/2.2Kg (ASTM D-1238).

241. An elastic article comprising at least one  
25 substantially hydrogenated block polymer, wherein the block polymer is characterized as having

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

30 ii) a viscosity at 0.1 rad/sec and 190°C, determined using parallel plate rheometry, defined by the inequality:

in viscosity at 0.1 rad/sec :  $1.10 \times 10^{-1}$ , ( $M_w$ ) = 1.89; and

iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as  
5 determined using UV-VIS spectrophotometry and proton NMR analysis.

242. A composition comprising at least one substantially hydrogenated block polymer, wherein the block polymer is  
10 characterized as having

i) a weight ratio of conjugated diene monomer unit to vinyl aromatic monomer unit before hydrogenation of greater than or equal to 60:40;

ii) a weight average molecular weight ( $M_w$ ) before  
15 hydrogenation of from 30,000 to 150,000, wherein each vinyl aromatic monomer unit (A) has a weight average molecular weight,  $M_{w_a}$ , of from 5,000 to 45,000 and each conjugated diene monomer unit (B) has a weight average molecular weight,  $M_{w_b}$ , of from 12,000 to 110,000; and

20 iii) a hydrogenation level such that each vinyl aromatic monomer unit block is hydrogenated to a level of greater than 90 percent and each conjugated diene monomer unit block is hydrogenated to a level of greater than 95 percent, as  
determined using UV-VIS spectrophotometry and proton NMR  
25 analysis.

243. The elastic article of Claim 8, wherein the surface treatment or crosslinking is carried out under an inert atmosphere, substantially free of oxygen.

30 244. The elastic article of Claim 8, wherein the surface treatment or crosslinking comprises electron beam irradiation.

245. The elastic article of Claim 244, wherein the electron beam irradiation is carried out under an inert atmosphere, substantially free of oxygen.

5 246. The elastic article of Claim 244, wherein the electron beam irradiation is carried out under a nitrogen atmosphere.

10 247. A pull-up diaper comprising the elastic article of Claim 1.

248. A training pants comprising the elastic article of Claim 1.

FIG. 1

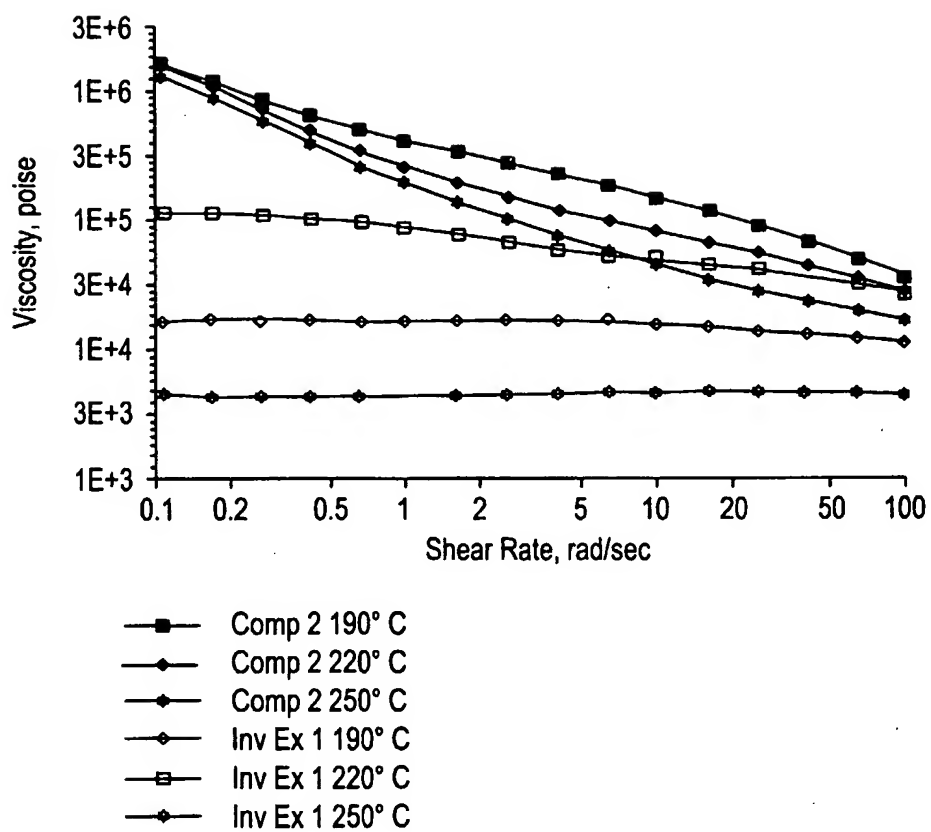


FIG. 2

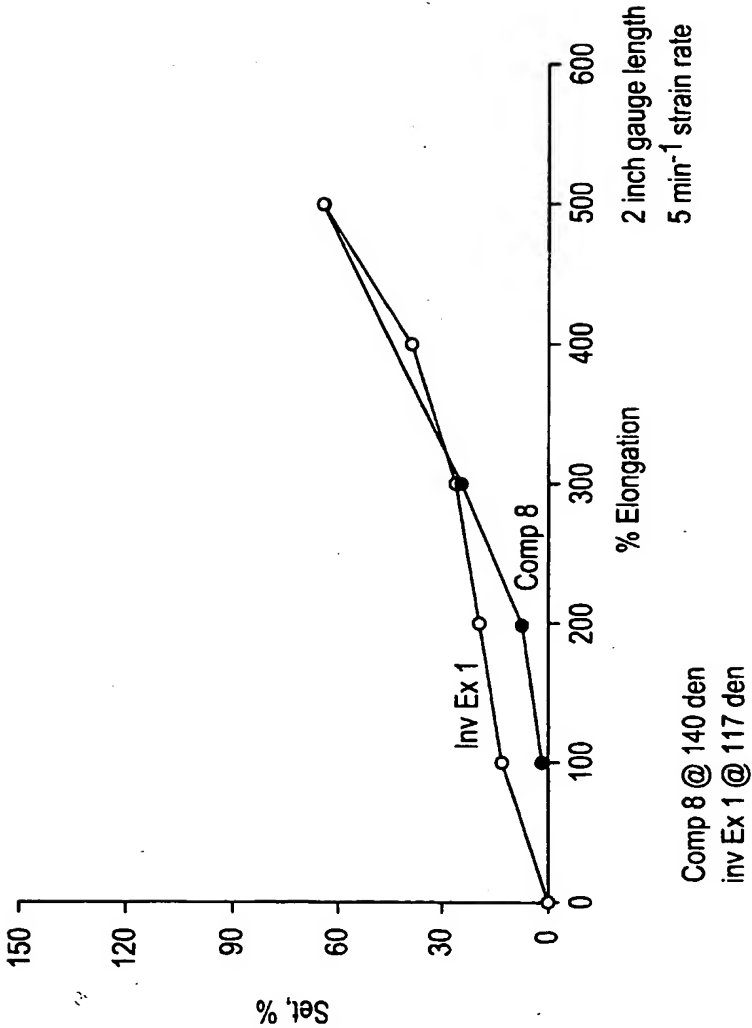




FIG. 3


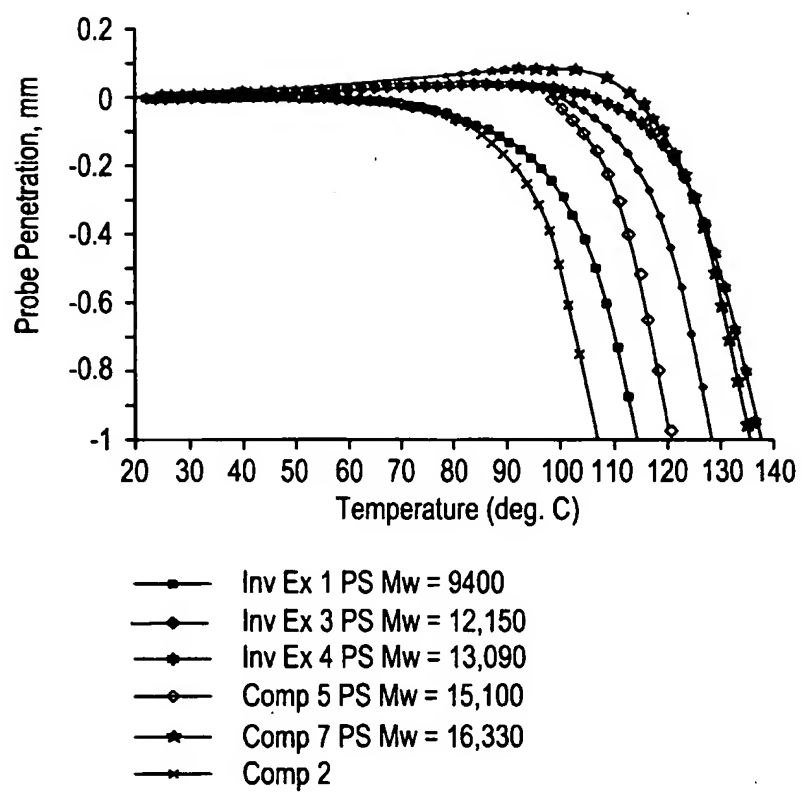


FIG. 4

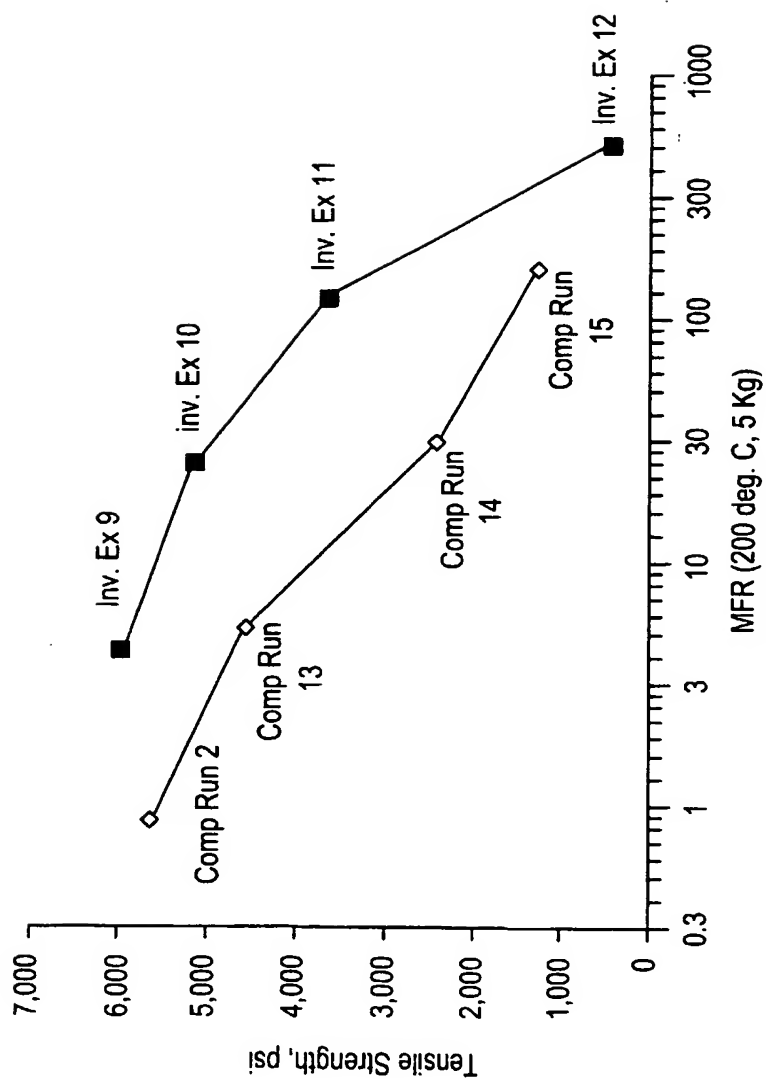

5/7

FIG. 5

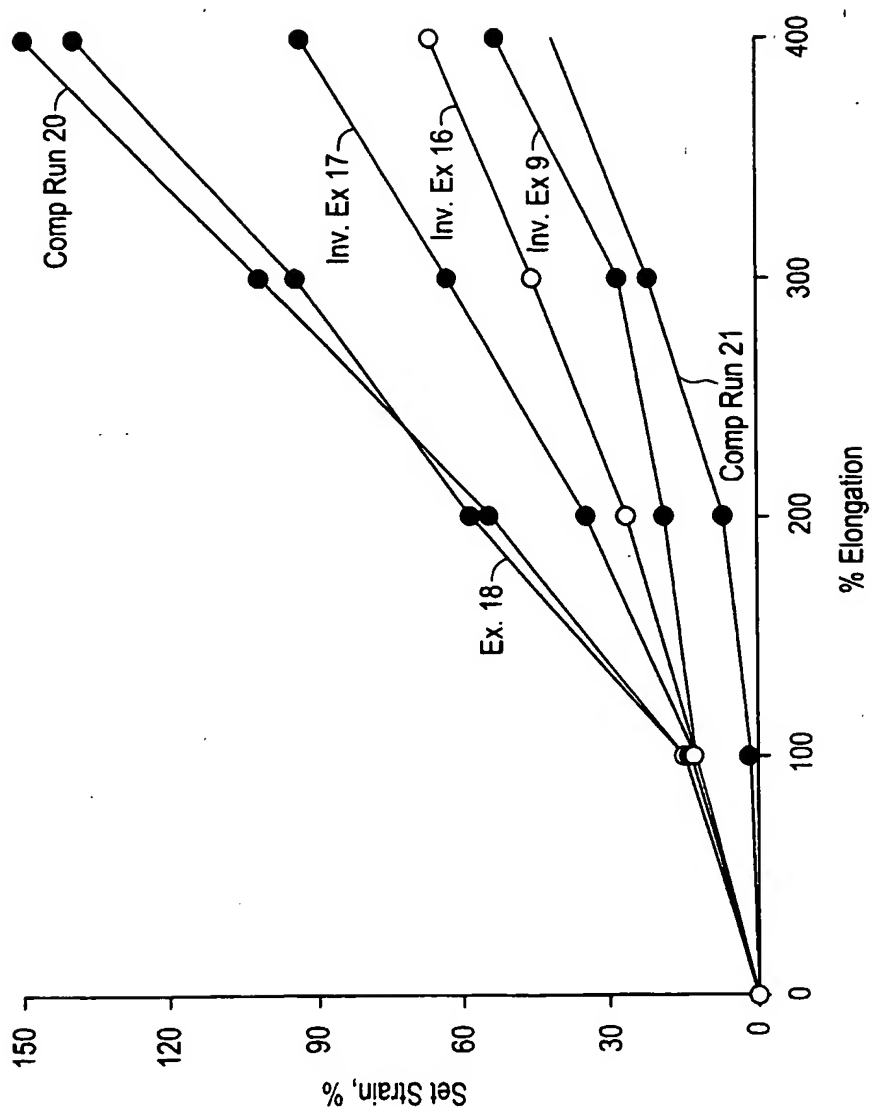


FIG. 6


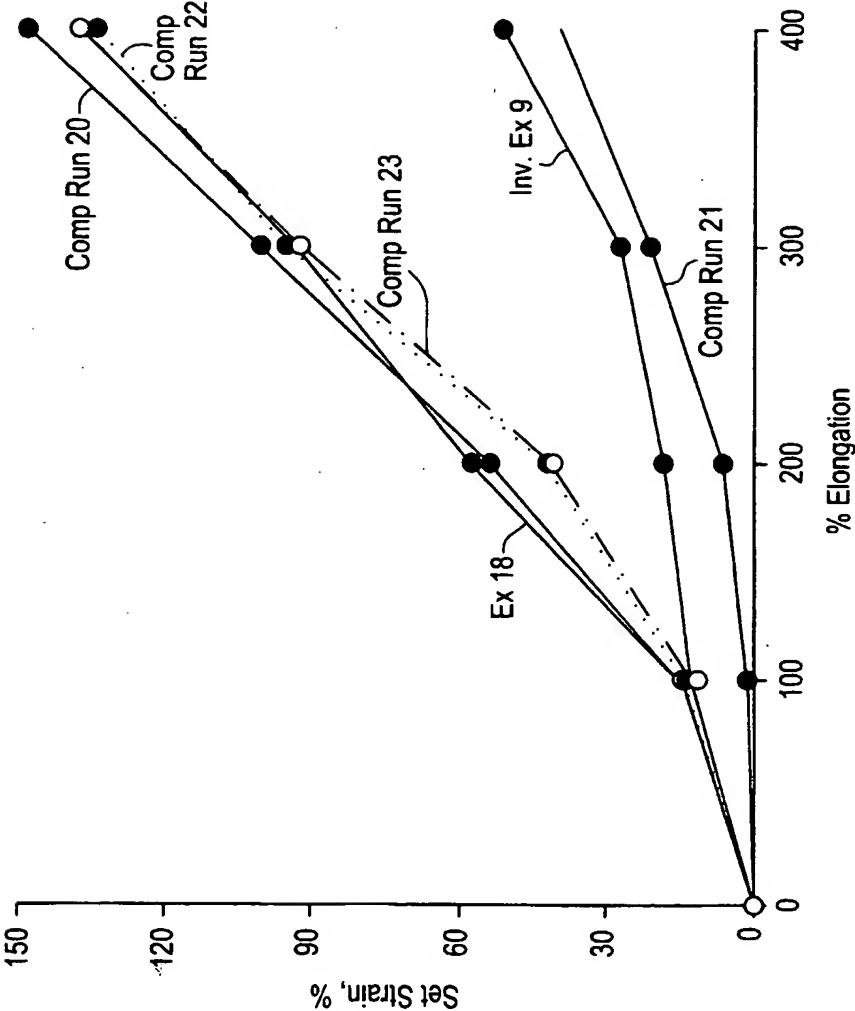


FIG. 7

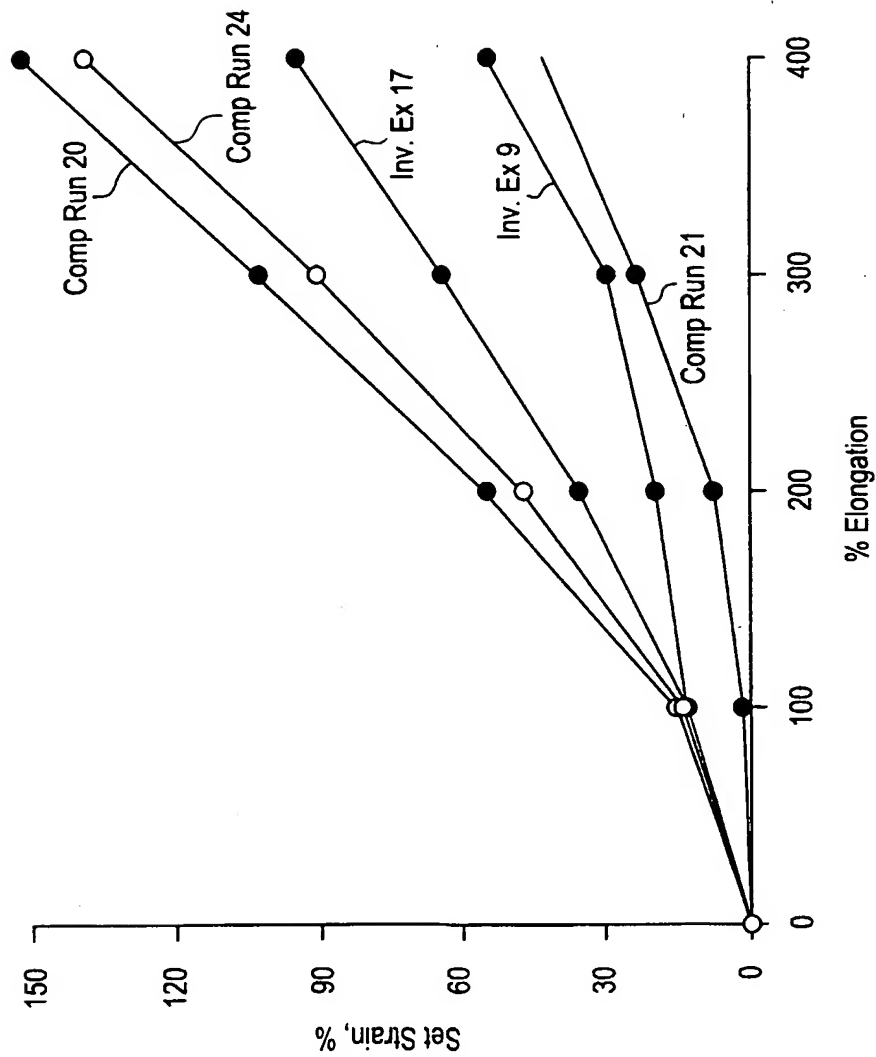

## INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/US 00/20826

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08L53/02 B32B27/00 A61L15/58 A43B13/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08L C09J C08F C08K C08C B32B A61L A43B B29D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	W0 94 21694 A (EXXON CHEMICAL PATENTS INC) 29 September 1994 (1994-09-29)	1,2,5,6, 10, 15-19, 21-25, 29, 34-39, 44-46, 52-54, 59-61, 69-73, 81,106, 110,111, 140,141, 156,182, 199,204, 206,211, 212, 228-232, 239-242
-/-		



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 October 2000

Date of mailing of the international search report

23/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2260 HV Rijswijk  
Tel: (+31-70) 340-2040 T: 31 651 6000  
Fax: (+31-70) 340-3011

Authorized officer

Hammond J.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/20826

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	* page 1, line 32-34 ; claims 7-12 ; examples 1-5 ; page 7, line 26 - page 8, line 5 ; page 11, line 14 - page 12, line 8 ; claims 1,3 * page 6, line 13 -page 7, line 25	3,4,7-9, 11-14, 20, 26-28, 30-33, 40-43, 47-51, 55-58, 62-68, 74-80, 82-105, 107-109, 112-139, 142-155, 157-181, 183-198, 200-203, 205, 207-210, 213-227, 233-238, 243-248
Y	--- WO 95 33006 A (DOW CHEMICAL CO) 7 December 1995 (1995-12-07)	3,4,7-9, 11-14, 20, 26-28, 30-33, 40-43, 47,51, 55-58, 62-68, 74-80, 82-105, 107-109, 112-139, 142-155, 157-181, 183-198, 200-203, 205, 207-210, 213-227, 233-238, 243-248
Y	* page 23, line 9 - page 24, line 9 ; page 26, line 1-8 ; abstarct ; claims 1-22 * page 2, line 11-25 --- US 5 905 097 A (WALTHER BRIAN W) 18 May 1999 (1999-05-18) the whole document --- -/--	1-248

## INTERNATIONAL SEARCH REPORT

Internat'l Application No

PCT/US 00/20826

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 96 34896 A (DOW CHEMICAL CO) 7 November 1996 (1996-11-07) * page 2, line 37 - page 3, line 4 ; example 8 ; page 5, line 37 - page 6, line 2 ; examples 2-6 * page 6, line 25-27 ----	1-248
A	EP 0 505 110 A (MITSUBISHI CHEM IND) 23 September 1992 (1992-09-23) abstract; claims 1-10 ----	1-248
A	WO 98 16582 A (EDMONSON MORRIS S ; ESNEAULT CALVIN P (US); HO THOI H (US); SPETH D) 23 April 1998 (1998-04-23) * page 4, line 22 - page 5, line 27 ; claims 4, 5, 8-14 * page 13, line 8-13 ----	1-248
A	DE 32 27 650 A (NIPPON ZEON CO) 17 March 1983 (1983-03-17) table 1 ----	1-248
A	WO 94 15997 A (DOW CHEMICAL CO) 21 July 1994 (1994-07-21) abstract; claims 1-21 -----	1-248



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/20826

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9421694 A	29-09-1994	US 5352744 A	04-10-1994
WO 9533006 A	07-12-1995	AU 2815895 A	21-12-1995
		AU 3509899 A	19-08-1999
		BR 9507907 A	16-09-1997
		CA 2191470 A	07-12-1995
		CN 1151750 A	11-06-1997
		DE 69511699 D	30-09-1999
		DE 69511699 T	23-12-1999
		EP 0767814 A	16-04-1997
		ES 2135750 T	01-11-1999
		JP 10501285 T	03-02-1998
US 5905097 A	18-05-1999	US 5578674 A	26-11-1996
		WO 9639462 A	12-12-1996
		US 5563204 A	08-10-1996
		CA 2150482 A	21-07-1994
		DE 69404125 D	14-08-1997
		DE 69404125 T	22-01-1998
		EP 0678108 A	25-10-1995
		ES 2104348 T	01-10-1997
		JP 8505426 T	11-06-1996
		MX 9400336 A	31-08-1994
		WO 9415997 A	21-07-1994
WO 9634896 A	07-11-1996	US 5612422 A	18-03-1997
		AU 703098 B	18-03-1999
		AU 5548796 A	21-11-1996
		BR 9608697 A	06-07-1999
		CA 2217207 A	07-11-1996
		CN 1183787 A	03-06-1998
		DE 69602743 D	08-07-1999
		DE 69602743 T	07-10-1999
		EP 0823916 A	18-02-1998
		EP 0842698 A	20-05-1998
		ES 2132918 T	16-08-1999
		JP 11504959 T	11-05-1999
		US 5700878 A	23-12-1997
		US 5654253 A	05-08-1997
EP 0505110 A	23-09-1992	JP 2995884 B	27-12-1999
		JP 4288360 A	13-10-1992
		DE 69212677 D	19-09-1996
		DE 69212677 T	02-01-1997
		US 5178926 A	12-01-1993
WO 9816582 A	23-04-1998	US 5741857 A	21-04-1998
		AT 194640 T	15-07-2000
		AU 721849 B	13-07-2000
		AU 4986897 A	11-05-1998
		BR 9712238 A	31-08-1999
		CN 1233268 A	27-10-1999
		DE 69702535 D	17-08-2000
		EP 0932647 A	04-08-1999
		HU 9904144 A	28-04-2000
		NO 991762 A	14-06-1999
		PI 332734 A	11-10-1999
		ZA 9709191 A	14-04-1999

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/20826

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3227650 A	17-03-1983	JP 1378132 C	08-05-1987
		JP 58017103 A	01-02-1983
		JP 61041922 B	18-09-1986
		CA 1216397 A	06-01-1987
		US 4452951 A	05-06-1984
WO 9415997 A	21-07-1994	CA 2150482 A	21-07-1994
		DE 69404125 D	14-08-1997
		DE 69404125 T	22-01-1998
		EP 0678108 A	25-10-1995
		ES 2104348 T	01-10-1997
		JP 8505426 T	11-06-1996
		MX 9400336 A	31-08-1994
		US 5563204 A	08-10-1996
		US 5578674 A	26-11-1996
		US 5905097 A	18-05-1999